



H I G H S P E C • H I G H V A L U E • H I G H S T A N D A R D S

AB38

SELF PROPELLED BOOM LIFT

- 13.5m maximum working height
- 6.1m outreach at 5.4m clearance height for excellent up-and-over ability
- Compact 1.5m width
- Tight 0.4m inside turning radius provides class leading manoeuvrability
- Simple one-hand proportional joystick control
- Efficient direct electric drive
- 3,550kg gross weight
- CE approved
- 5 year structural warranty

UpRight

MAXIMUM WORKING HEIGHT	13.50m
MAXIMUM PLATFORM HEIGHT	11.45m
MAXIMUM WORKING OUTREACH	6.10m
CLEARANCE HEIGHT AT MAX. OUTREACH	5.40m
PLATFORM CAPACITY	215kg
PLATFORM DIMENSIONS	1.03m x 0.55m
OVERALL WIDTH	1.50m
OVERALL LENGTH	4.04m
STOWED HEIGHT	1.99m
INSIDE TURNING RADIUS	0.4m
OUTSIDE TURNING RADIUS	2.4m
GROUND CLEARANCE	150mm
WEIGHT (CE version)	3550kg
DRIVE SPEED STOWED	4kmh
DRIVE SPEED ELEVATED	0.7kmh
GRADEABILITY	36%
POWER SOURCE	48V DC
CONTROLS	ONE-HAND PROPORTIONAL JOYSTICK


Continuous A-weighted sound pressure level at workstation does not exceed 70dB(A)

STANDARD FEATURES

- Proportional one-hand joystick control
- Minimal front boom overhang
- Ultra-tight inside turn radius
- Tilt alarm c/w cut-out
- Large, two person platform
- Direct DC drive parallel wired wheel motors
- Solid puncture-proof tyres
- Duplicate boom controls at ground level
- Automatic battery charger with line contactor allowing AC/DC operation
- CE compliance

OPTIONAL EXTRAS

- White non-marking tyres
- Flashing amber beacon
- Power cable to platform

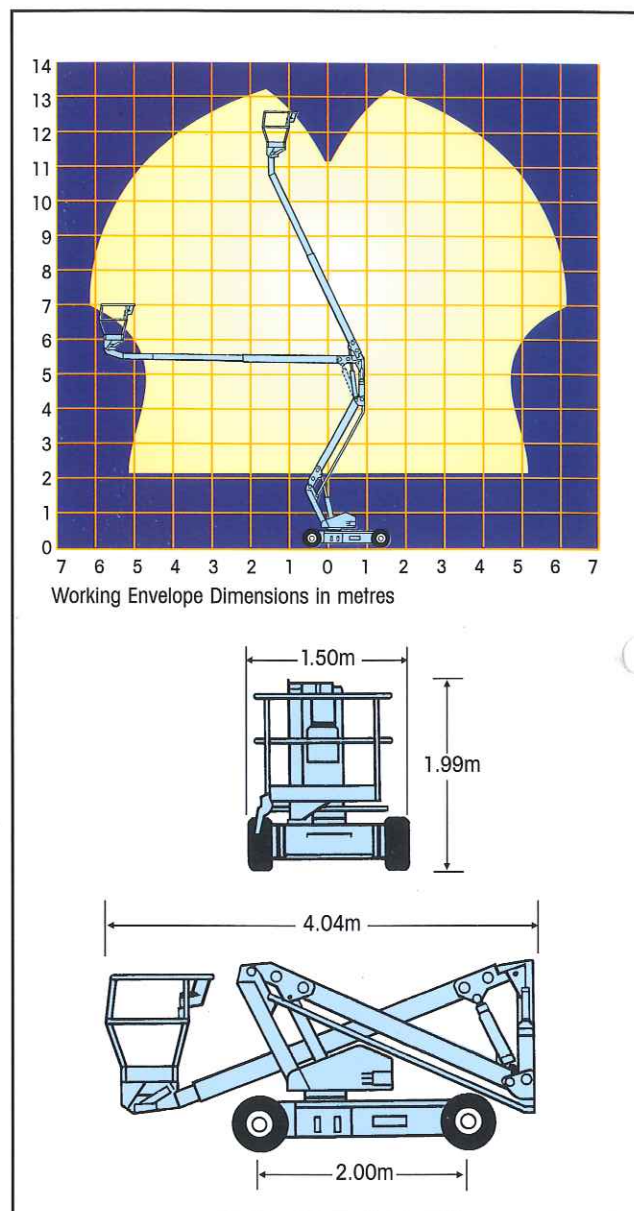

Class leading turning radius.



Compact stowed dimensions.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

MANUFACTURED BY
UpRight

UpRight

Pottery Road, Dun Laoire, Ireland.
Tel: +353 1 202 4100
Fax: +353 1 202 4101
Internet: <http://www.uprighteuro.com>