
Articulated Boom Lift




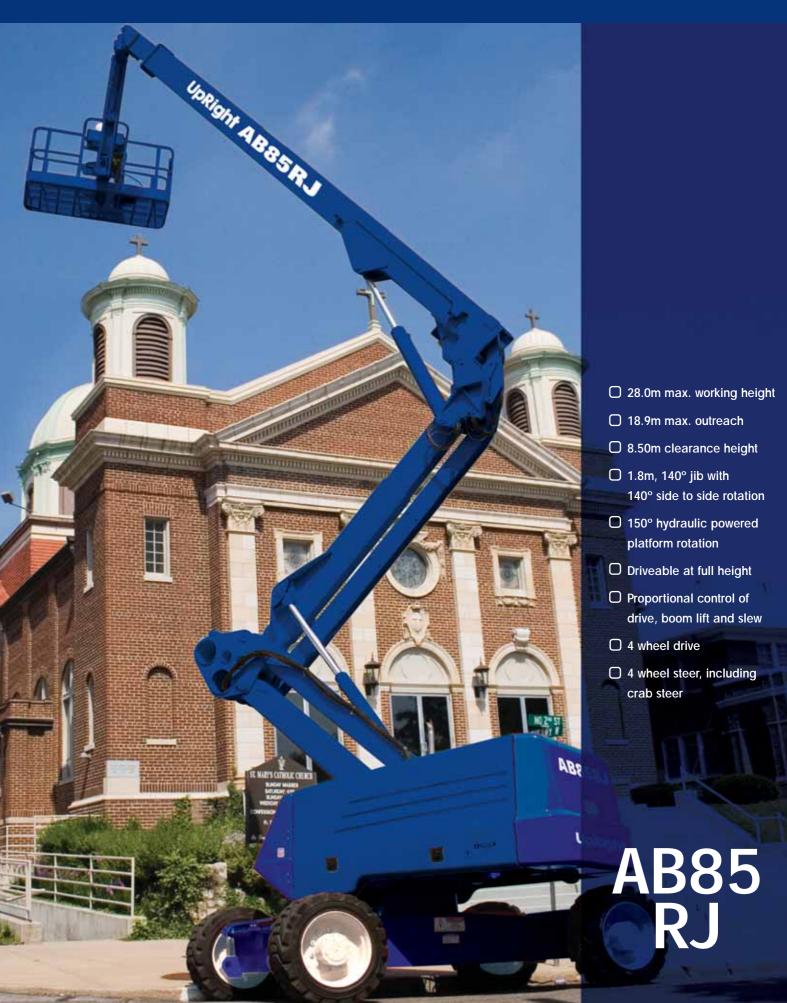


AB85RJ boom lift specifications

	AB85RJ
max. working height	28.0m
max. platform height	26.0m
max. outreach	18.9m
max. clearance height	8.50m
platform capacity (SWL)	227kg
platform size	0.91m x 2.44m
platform rotation	150°
jib length	1.8m
jib working arc	140°
jib rotation	140° side to side
overall width C	2.6m
overall length A	13m
stowed height B	3.0m
min. transport length	13m
gross weight	17,735kg
inside turning radius	2.94m
max. drive speed (lowered)	4.8kmh
ground clearance	330mm
gradeability	45%
tyres	15 x 625 loader lug poly filled
drive system	4 wheel drive
controls	joystick proportional drive, lift, extend, jib rotate and slew/rheostat other boom functions
power source	Deutz F4L-2011 (64hp) air cooled engine

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.



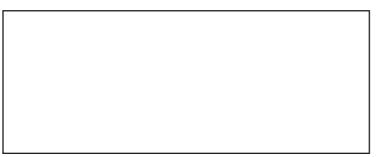



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K. BP3. AB85RJ 6/09

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058

www.upright.com

standard features

- 1.8m, 140° jib with 140° side to side rotation
- Hydraulic powered platform rotation
- 4 wheel drive
- 4 wheel steer, including crab steer
- Proportional control of drive, boom lift and slew
- Foam filled lug tyres
- Driveable at full height
- Operator horn
- Extra finger protection handrail
- 1 year parts and labour warranty
- 5 year structural warranty

options

- Hydraulic generator
- Platform control box cover
- Twin platform work lights
- Airline to platform with take-up reel
- Amber beacon on boom
- Cold weather start kit
- Drive motion alarm

