

# UpRight

## MB20/20N/26

# mast booms

vertical articulated lifts

Working heights to  
8m (26ft.) or 10m (32ft.)

Working outreach to 3m (10ft.)

Platform capacity for  
2 people and tools

Articulating jib

360° mast rotation

One-hand proportional control

Compact dimensions on MB20N  
810mm (32in.) wide

300mm (11.8in.) inside  
turning radius

Driveable while fully elevated

Hydraulic depression mechanism

Non-marking tyres


14° (25%) Gradeability

Five year  
structural warranty



specifications	MB20N	MB20	MB26
working height (max.) <b>B</b>	8m (26ft.)*	8m (26ft.)*	10m (32ft.)*
platform height (max.) <b>A</b>	6m (19ft. 8in.)	6m (19ft. 8in.)	8m (26ft. 3in.)
working outreach (max.)	2.64m (8ft. 6in.)	2.64m (8ft. 6in.)	3m (10ft.)
drive height (max.)	fully elevated	fully elevated	fully elevated
platform capacity	215kg (475lbs.)	215kg (475lbs.)	215kg (475lbs.)
platform size	0.78m x 0.73m (31in. x 29in.)	0.78m x 0.73m (31in. x 29in.)	0.78m x 0.73m (31in. x 29in.)
stowed height <b>C</b>	1.98m (6ft. 5in.)	1.98m (6ft. 5in.)	1.98m (6ft. 5in.)
length <b>D</b>	2.2m (8ft.)	2.2m (8ft.)	2.8m (9ft. 4in.)
width <b>E</b>	0.81m (32in.)	0.99m (39in.)	0.99m (39in.)
gross weight	2,570kg (5,654lbs.)	2,172kg (4,778lbs.)	2,672kg (5,878lbs.)
drive speed - stowed	3.0km/h (1.9mph.)	3.0km/h (1.9mph.)	3.0km/h (1.9mph.)
- elevated	0.7km/h (0.4mph.)	0.7km/h (0.4mph.)	0.7km/h (0.4mph.)
inside turning radius	0.3m (11.8in.)	0.3m (11.8in.)	0.3m (11.8in.)
outside turning radius	1.85m (6ft. 1in.)	2.1m (6ft. 10in.)	2.1m (6ft. 10in.)
tail swing	250mm (9in.)	140mm (5in.)	140mm (5in.)
jib arc	138 degrees	138 degrees	138 degrees
mast rotation	360° (non-continuous)	360° (non-continuous)	360° (non-continuous)
gradeability	14 degrees (25%)	14 degrees (25%)	14 degrees (25%)
control system	smooth, one-hand proportional controller		
power source	4 x 6V x 375 Ah batteries	4 x 6V x 375 Ah batteries	4 x 6V x 375 Ah batteries

\*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.  
Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.  
Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.


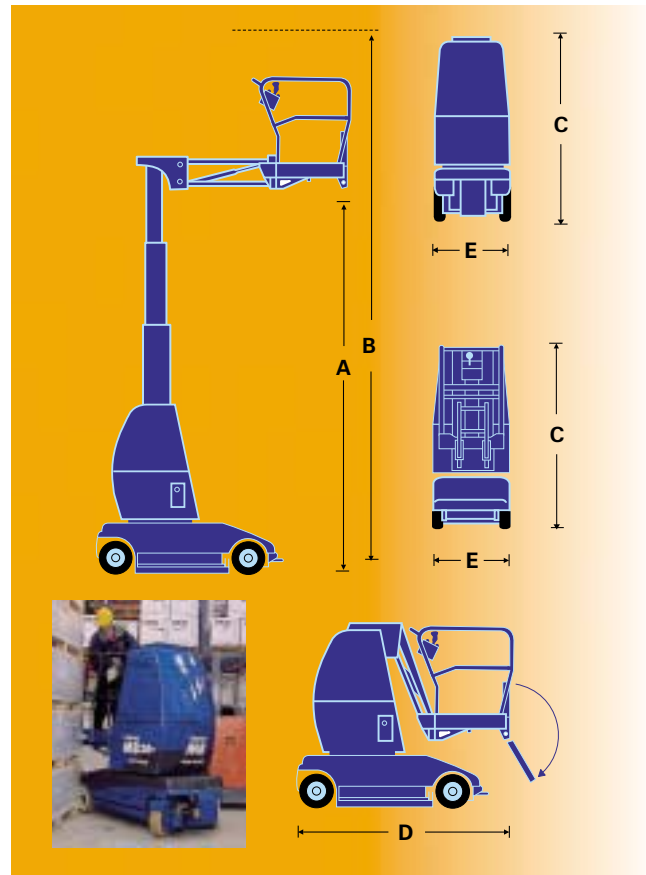


## standard features

- Proportional one-handed controller
- Ultra-tight inside turning radius
- Tilt alarm
- Two person basket
- Rated for outdoor use
- Solid non-marking tyres
- Ground control station
- Self-seeking automatic charger with line contactor allowing AC/DC operation
- CE compliance
- Automatic battery top up
- 1 year parts/service
- 5 year structural warranty

## options

- Flashing amber beacon
- Power to platform (220V or 110V)
- Special paint colours
- Environmental green oil

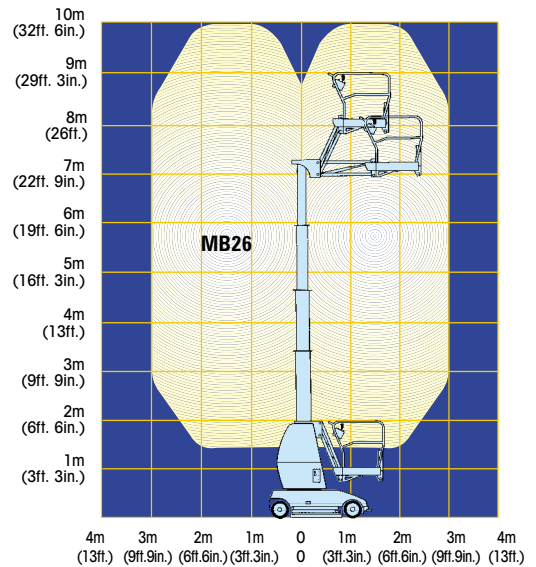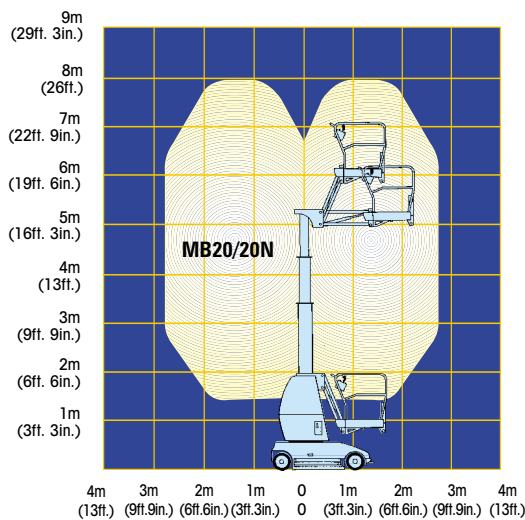

Meets or exceeds applicable requirements of OSHA and ANSI A92.5 - 1999.

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**

**UpRight**

GLOBAL PROVIDER OF ACCESS SOLUTIONS

