

UpRight
MX15/19

Scissor lifts

micro electric

Working heights to
6.5m (21ft.) or 7.8m (25ft.)

Extremely tight turning
radius gives excellent
manoeuvrability

Compact dimensions
0.76m (30in.) wide
and 1.75m (68.75in.) length

Fully proportional controls

Roll - out deck extension
provides larger platform area
and over-reach

Non-marking tyres
protect floor finishes

Hydraulic depression
mechanism

Five year
structural warranty



specifications	MX15	MX19
working height A	6.5m (21ft.)*	7.8m (25ft.)*
platform height B	4.5m (15ft.)	5.8m (19ft.)
maximum drive height	4.5m (15ft.)	5.8m (19ft.)
platform capacity	250kg (550lbs.)	227kg (500lbs.)
platform size (inside- with deck extended)	0.72m x 2.54m (28.5in. x 100in.)	0.72m x 2.54m (28.5in. x 100in.)
weight	1,343kg (2,960lbs.)	1,406kg (3,100lbs.)
stowed height E	1.8m (74.5in.)	2.01m (79.25in.)
stowed length D - steps removed	1.75m (68.75in.) 1.6m (63in.)	1.75m (68.75in.) 1.6m (63in.)
width C	0.76m (30in.)	0.76m (30in.)
drive speed - max. with platform raised	3.7km/h (2.3mph.) 1km/h (0.62mph.)	3.7km/h (2.3mph.) 1km/h (0.62mph.)
gradeability	16 degrees (29%)	16 degrees (29%)
inside turning radius	152mm (6in.)	152mm (6in.)
ground clearance	95mm (3.75in.)	95mm (3.75in.)
lift speed - raise/lower	19/20 seconds	19/18 seconds
toeboards	152mm (6in.)	152mm (6in.)
control system	smooth, one-hand proportional controller	
drive system	dual front wheel hydraulic motors	
tyres	31cm (12in.) diameter, solid rubber, non-marking	
power source	24V 4hp DC electric motor 4 x 6V 220 Ah batteries	
battery charger	25 amp 90V - 240V automatic with ammeter	
parking brake	2 wheel, spring-applied hydraulic release and manual release	

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

Roll-out deck extension
with foot pedal release

Side forklift pockets

Non-marking tyres

Swing-out service modules

Tilt alarm, descent alarm

Selectable motion/alarm

Proportional controls

Lift-up rear guardrail
to ease loading

Ground view grates
in deck extension

AC power to platform

Hour meter

Horn, push button
on controller

Hour meter/low
voltage indicator

1 year parts/service


5 year structural warranty

options

Removable controller

Special paint colours

Environmental green oil

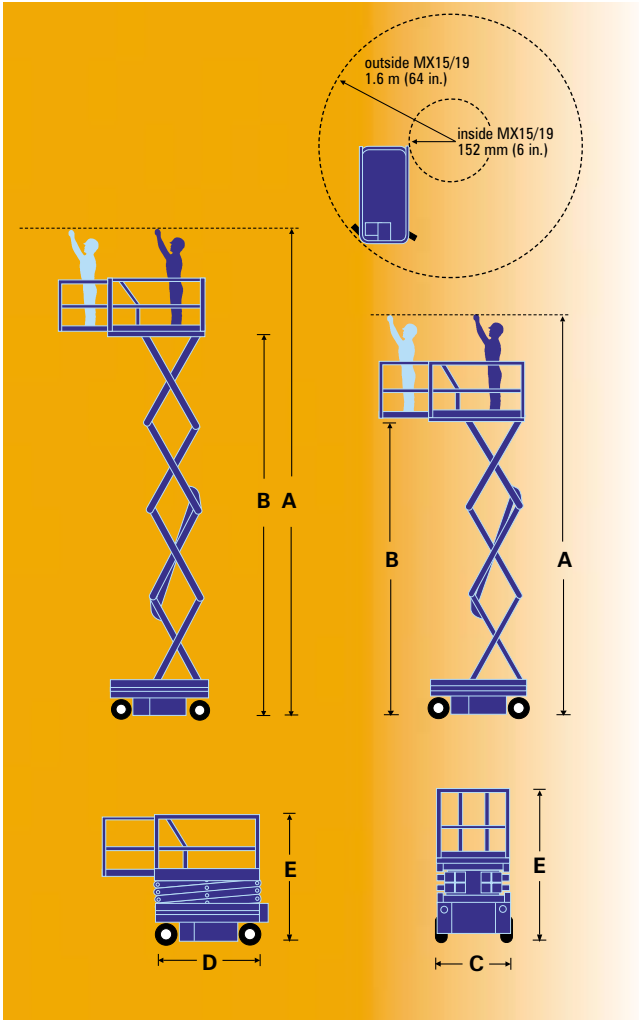

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives



manufactured by
UpRight

*Compact dimensions
and tight turning
radius provides
excellent
manoeuvrability*

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

