

UpRight

Rhino Lift



PERSONNEL LIFTS

- Quick and simple to set up
- Easy to move - will pass through single doorways
- Heavy-duty, all steel construction
- Entry from ground level
- Self-contained, interlocking outriggers
- Optional Laser Locator for accurate positioning



Transport wheels enable Rhino Lift to easily clear door threshold.

UpRight

Specifications

RL15

RL19

RL24

Working height (A)	6.5 m (21 ft.)	7.8 m (25 ft.)	9.2 m (30 ft.)
Platform height max. (B)	4.5 m (14 ft 8 in.)	5.8 m (19 ft.)	7.2 m (23 ft. 6 in.)
Platform capacity	136 kg (300 lbs.)	136 kg (300 lbs.)	136 kg (300 lbs.)
Stowed dimensions			
Height (C)	1.96 m (77.5 in.)	1.96 m (77.5 in.)	1.96 m (77.5 in.)
Length (D)	1.83 m (64.25 in.)	1.83 m (64.25 in.)	1.83 m (64.25 in.)
Width (E)	0.75 m (29.75 in.)	0.75 m (29.75 in.)	0.75 m (29.75 in.)
Footprint (outriggers extended)			
Length (F)	1.48 m (58.5 in.)	1.48 m (58.5 in.)	1.48 m (58.5 in.)
Width (G)	1.42 m (56 in.)	1.42 m (56 in.)	1.42 m (56 in.)
Weight -AC	372 kg (820 lbs.)	404 kg (890 lbs.)	435 kg (960 lbs.)
-DC	381 kg (840 lbs.)	410 kg (910 lbs.)	445 kg (980 lbs.)
Guardrail height	1.1 m (43.5 in.)	1.1 m (43.5 in.)	1.1 m (43.5 in.)
Toeboard height	150 mm (6 in.)	150 mm (6 in.)	150 mm (6 in.)
Power source -AC	AC electric motor - 110 VAC, 60 Hz. or 220 VAC, 50 Hz.		
-DC	DC electric motor, one 12 V battery, Grp. 27, 105 amp hours		
Battery charger (not AC)	110 volts, 60 Hz. or 220 volts, 50 Hz.		


Options

- Wiring for 110 AC power at platform
- Laser Locator
- Fluorescent tube caddy
- Tool tray

Meets or exceeds applicable requirements of OSHA and ANSI A92.6-1990

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

Manufactured by
UpRight

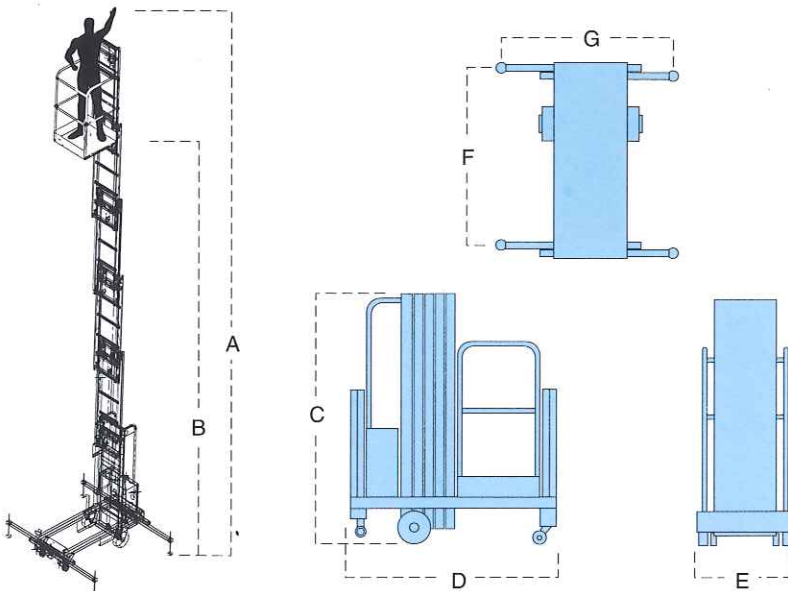

INSTANT

ZIP-UP

INSTANT ZIP-UP LTD
AUDLEY AVENUE, NEWPORT, SHROPSHIRE TF10 7DP
TEL: (01952) 825815 FAX: (01952) 825635