

# SB54J telescopic boom specifications

	SB54J
max. working height	18.3m
max. platform height	16.5m
max. working outreach	14m
jib arc	140°
platform capacity (SWL)	227kg
platform size	0.78m x 1.7m
platform rotation	180°
turret rotation	360° continuous
width A	2.27m
stowed height B	2.58m
stowed length C	6.7m
wheelbase	2.6m
ground clearance	440mm
gradeability	40%
max drive speed - elevated	1.6km/h
max drive speed - stowed	4km/h
tyres	foam filled, 14 ply
gross weight	6350kg
power source	diesel engine

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.



BP2-SB54J 7/07

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


[www.upright.com](http://www.upright.com)

## standard features

- Three section telescoping boom, steel base boom and aluminium intermediate and tip booms
- Proportional drive, lift and slew
- 4 wheel drive
- Automatic terrain following steer axle
- Base controls include drive and steer function
- Drive motion alarm
- Flashing light
- Hour meter, high engine temperature and low oil pressure shut down

## options

- AC generator
- Bump guard
- Non marking tyres
- Air hose to platform
- Wide platform

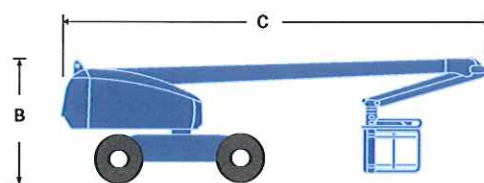

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**  
POWERED ACCESS