

UpRight

SL-26N

SELF-PROPELLED LIFTS

- 10m working height
- 680kg Platform capacity
- Large platform area - 1.52 x 3.66m
- Proportional joystick controls for smooth, precise operation
- Electric, Diesel or Bi-energy (DC and diesel) power sources
- Optional Roll-out deck extension



This product is available with the CE Mark confirming compliance with all relevant European Machinery Directives



UpRight

SL-26N

SELF-PROPELLED LIFTS

FEATURES AND SPECIFICATIONS (All Models)

- Working height: 10m (32ft)
- Platform height: maximum. 8m (26ft)
minimum. 1.29m (51ft)
- Driveable height: 8m (26ft)
- Maximum platform capacity: 680kg (1500lbs)*
- Platform size: 1.52m x 3.66m (60in. x 144in.)
- Control system: proportional, single axis joystick with thumb rocker steering and interlock switch
- Dimensions:
 - Overall height: 2.40m (94.5in.)
 - Overall length: 3.79m (149in.)
 - Wheelbase: 2.54m (100in.)
 - Overall width: 1.68m (66in.) with standard tyres†
- Ground clearance: axle 200mm (7.76in.)
chassis: 320mm (12.5in.) with standard tyres
- Turning radius (inside): 2.97m (9ft.9in.)
- Drive: dual rear wheel with hydraulic motors
- Parking brake: spring applied, hydraulic released
- Tyres B78-13ST slab Electric. Terra Grip on Diesel and Bi-energy
- Guardrails: fold down with gate, 1.11m (43.5in.) high
- Toeboards: 150mm (6in.)
- Descent alarm
- Hour meter
- Wiring for power at platform
- Battery Condition Indicator
- Low voltage indicator

*with foam filled flotation tyres.
600kg (1300lbs) with standard air filled tyres


† Diesel and Bi-energy units are
fitted with RT tyres, increasing
overall width to 1.78m

OPTIONAL FEATURES

- 110V AC 60 Hz generator
- Flashing amber beacon/horn
- High flotation terragrip tyres
(standard on diesel and Bi-Energy)
- Poly filled tyres
- High flotation softac tyres
- 3 cylinder 24.5 HP Water cooled
Kubota dual fuel engine

FEATURES AND SPECIFICATIONS (Specific Models)

Item	Bi-Energy	Electric	Diesel
Energy Source	20HP Kubota 3 Cylinder water- cooled diesel engine. Two 24V DC motors with 8 x 6V 220 Ah Batteries	Two 24V DC motors 8 x 6 V 220 Ah Batteries	18HP Kubota Water cooled Diesel engine
Battery Charger	220V / 110V 40A 50hz Dual voltage	220V / 110V 40 amp 50HZ Dual voltage	N/A
Lift Speeds			
Raise	20 sec. (D) 33 sec. (E)	33 sec.	20 sec.
Lower	35 sec.	35 sec.	35 sec.
Gradeability	21% (12 Degrees)	23%	30%
Drive Speeds			
Platform Lowered	5.0kmh	4.2kmh	5.0kmh
Platform Raised	0.8kmh	0.8kmh	0.8kmh
Weight	2,644kg (5828 lbs)	2,247kg	2,333kg

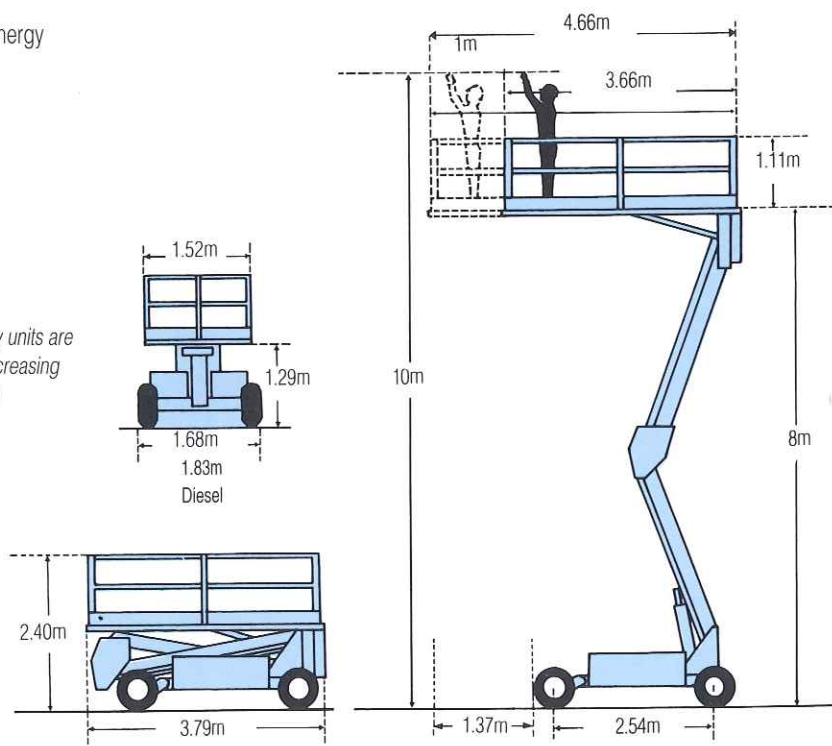

*Maximum capacity on deck extension is 226kg (500lbs)

Manufactured by
UpRight



Hi-Reach Access
Blackworth Industrial Estate
Highworth
Swindon SN6 7NA
Tel: 01793 766744
Fax: 01793 763503