

UpRight SL14

Self-Propelled Lifts

- ◆ 20 ft. working height
- ◆ Up to 660 lbs. platform capacity
- ◆ Drives through small doorways and entrances
- ◆ Non-marking tires
- ◆ Maneuvers well in congested areas
- ◆ Optional roll-out deck extension



UpRight

Key Standard Features

- ◆ Dual front wheel drive
- ◆ Non-marking tires
- ◆ Driveable while platform elevated
- ◆ Crane and forklift points
- ◆ Foot operated interlock switch
- ◆ Safety toeboards

Specifications	U.S.	Metric
Platform capacity (max.)	660 lbs.	300 kg
w/roll-out deck extension	550 lbs.	250 kg
Platform size (inside)	25.75 in. x 59 in.	.66 m x 1.50 m
w/roll-out deck extension	23.25 in. x 98 in.	.59 m x 2.49 m
Weight - standard	2,000 lbs.	907 kg
w/roll-out deck extension	2,150 lbs.	975 kg
Working height	20 ft.	6.10 m
Platform height	14 ft.	4.30 m
Max. drive height	14 ft.	4.30 m
Stowed height	76-80 in.	1.90-2.00 m
Length	64.25 in.	1.64 m
Width	28.75 in.	0.73 m
Drive speed – maximum	2.53 mph	4.20 km/h
with platform raised	0.75 mph	1.20 km/h
Gradeability	25%	14 degrees
Inside turning radius	18 in.	0.46 m
Lift speed – raise/lower	18 sec./23.5 sec.	18 sec./23.5 sec.
Toeboards	7 in.	.18 m

Control system Two speeds forward/reverse/lift with toggle switches and foot-operated interlock switch

Drive system Dual front wheel with hydraulic motors

Tires 14 in. (356 mm) diameter solid rubber, non-marking


Power source 24V 4HP DC electric motor 4 x 6V 220 AH batteries

Battery charger 25 amp automatic with ammeter

Parking brake 2 wheel, spring-applied, hydraulic-released

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 – 1990.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment. UpRight also manufactures a complete line of scaffolding and other aerial work platforms. Contact your UpRight distributor for information on other products.

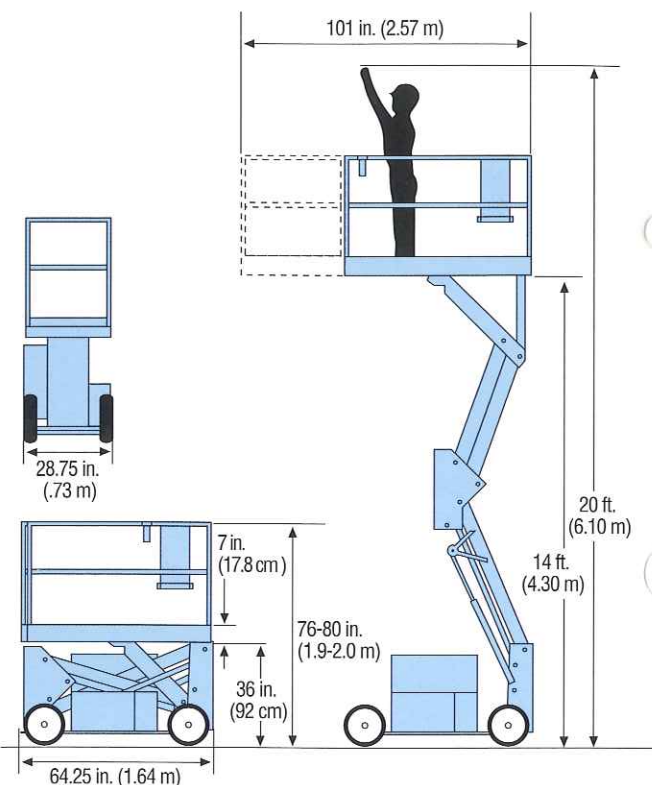

Options

- ◆ Roll-out deck extension
- ◆ AC outlet on platform
- ◆ Proportional controls
- ◆ Horn, push button on controller
- ◆ Flashing amber beacon
- ◆ Hour meter, low voltage indicator
- ◆ Removeable controller
- ◆ Tilt alarm

UpRight

USA (800) 926-5438, (209) 896-5150, FAX: (209) 896-9012

1775 Park Street, Selma, CA 93662

Europe (353) 1-285-3333 FAX: (353) 1-284-0015

Pottery Road, Dun Laoire, Ireland

Printed in U.S.A. Copyright UpRight, Inc. 1994. Form No. 108-940810-A+