

# UpRight SL20

## Self-Propelled Lifts

- ◆ 26 ft. working height
- ◆ 650 lbs. platform capacity
- ◆ Fully proportional, joystick controller
- ◆ Non-marking tires
- ◆ Dual rear wheel drive
- ◆ Roll-out deck extension
- ◆ Drives through standard doorway
- ◆ 4 HP DC electric motor



# UpRight




### Key Standard Features

- ◆ Dual rear wheel drive
- ◆ Roll-out deck extension
- ◆ Integral cushion down
- ◆ Pothole protection system
- ◆ Tilt alarm, descent alarm
- ◆ Lift guide attachment points for crane lifting
- ◆ Fully proportional, one-hand joystick controls
- ◆ Heavy duty, round, fold-down guardrails for doorways

Specifications	U.S.	Metric
Platform capacity (max.)	650 lbs.	294 kg
Platform size (inside)	27.75 in. x 96 in.	.70 m x 2.44 m
Weight	3,127 lbs.	1,423 kg
Working height	26 ft.	7.92 m
Platform height	20 ft.	6.10 m
Max. drive height	20 ft.	6.10 m
Stowed height	92.5 in.	2.35 m
with guardrails folded	79.5 in.	2.02 m
Length	104.25 in.	2.65 m
Width	33 in.	.84 m
Drive speed – maximum	2.3 mph	3.70 km/h
with platform raised	0.7 mph	1.13 km/h
Gradeability	25%	14 degrees
Inside turning radius	55 in.	1.40 m
Ground clearance	4 in.	102 mm
Lift speed – raise/lower	16 sec./28 sec.	16 sec./28 sec.
Toeboards	6 in.	152 mm

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 – 1990.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment. UpRight also manufactures a complete line of scaffolding and other aerial work platforms. Contact your UpRight distributor for information on other products.

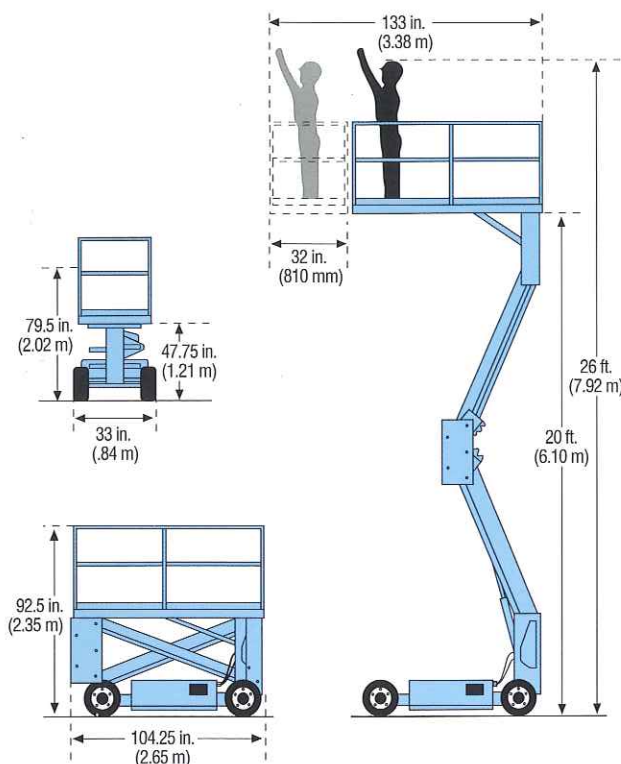

### Options

Control system ..... Fully proportional, joystick controller

Power source ..... 24V 4HP DC electric motor 4 x 6V 220 AH batteries

Battery charger ..... Fully automatic, 25 amp with ammeter

Non-marking tires ... 16 in. (410 mm) diameter, solid rubber

Parking brake ..... Dual wheel, spring-applied, hydraulic-released

- ◆ Aluminum diamond plate deck
- ◆ 40 amp battery charger
- ◆ Parking brake release
- ◆ Removeable controller
- ◆ Air line to platform
- ◆ Hour meter/low voltage indicator
- ◆ Wiring for 110V AC power at platform
- ◆ Flashing amber beacon
- ◆ Travel alarm

# UpRight

USA (800) 926-5438, (209) 891-5200, FAX: (209) 896-9012

1775 Park Street, Selma, CA 93662

Europe (353) 1-285-3333 FAX: (353) 1-284-0015

Pottery Road, Dun Laoire, Ireland

Printed in U.S.A. Copyright UpRight, Inc. 1995. Form No. 105-950210-A+