

UpRight
SL26/30SL

speed level

articulated vertical lifts

Working heights
to 10m (32ft.) and
11m (36ft.)

Fast platform leveling
on most uneven
slopes or ground

Rough terrain features
include 4WD, oscillating
front axle, flotation tyres

19° (35%) + gradeability

Proportional drive/lift
controls for smooth
precise operation

Diesel power

Five year
structural warranty



specifications	SL26SL	SL30SL
working height A	10m. (32ft.)*	11m. (36ft.)*
platform height B	8m. (26ft.)	9m. (30ft.)
max. drive height	8m. (26ft.)	9.1m. (30ft.)
platform capacity (max.)	680kg. (1,500lbs.)	590kg. (1,300lbs.)
platform size (inside)	1.72m. x 3.66m. (67.5in. x 144in.)	1.72m. x 4.23m. (67.5in. x 166.25in.)
weight - diesel	2,853kg. (6,290lbs.)	2,967kg. (6,540lbs.)
stowed height E	2.60m. (102.5in.)	2.60m. (102.5in.)
length D	3.79m. (149in.)	4.39m. (173in.)
width C	2.13m. (84in.)	2.13m. (84in.)
wheelbase	2.54m. (100in.)	2.54m. (100in.)
drive speed -max. with platform raised	5.0km/h. (3.1mph.) 0.8km/h. (0.5mph.)	5.0km/h. (3.1mph.) 0.8km/h. (0.5mph.)
gradeability	19 degrees (35%)	19 degrees (35%)
axle ground clearance	200mm. (7.75in.)	200mm. (7.75in.)
chassis ground clearance	320mm. (12.5in)	320mm. (12.5in)
inside turning radius	3.9 m (13 ft.)	3.9 m (13 ft.)
lift speed - raise/lower	21 / 32seconds	24 / 36seconds
toeboards	152mm. (6 in.)	152mm. (6 in.)
guardrails folded w/gate	1.1m. (43.5in.)	1.1m. (43.5in.)
control system	proportional, single axis controller with thumb rocker steering, levelling control: two toggle switches and bubble level (inoperable above interlock height)	
platform levelling	13° to either side; 9° fore, 9° aft	
drive system	four wheel with hydraulic motors	
power source	22hp Kubota diesel, water cooled engine	
tyres	26 x 12.00 - 12 NHS Super Terra-grip with Trac Seal	
parking brake	spring-applied/hydraulically-released, multiple disc	


* Metric working height is 2m. above platform height. Working height in the U.S. is 6ft. above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

Diesel
 Speed Level -
 powered platform levelling
 Oscillating front axle
 Dual multi-disc brakes
 One-hand, proportional controls
 Wired for AC outlet on platform
 Fold-down guardrails
 Descent alarm/hour meter
 1 year parts/service
 5 year structural warranty

options

2000 watt/110V
 AC generator
 All motion alarm
 Flashing amber
 beacon and horn
 Poly-fill for RT tyres
 Diesel exhaust scrubber
 Special paint colours
 Environmental green oil

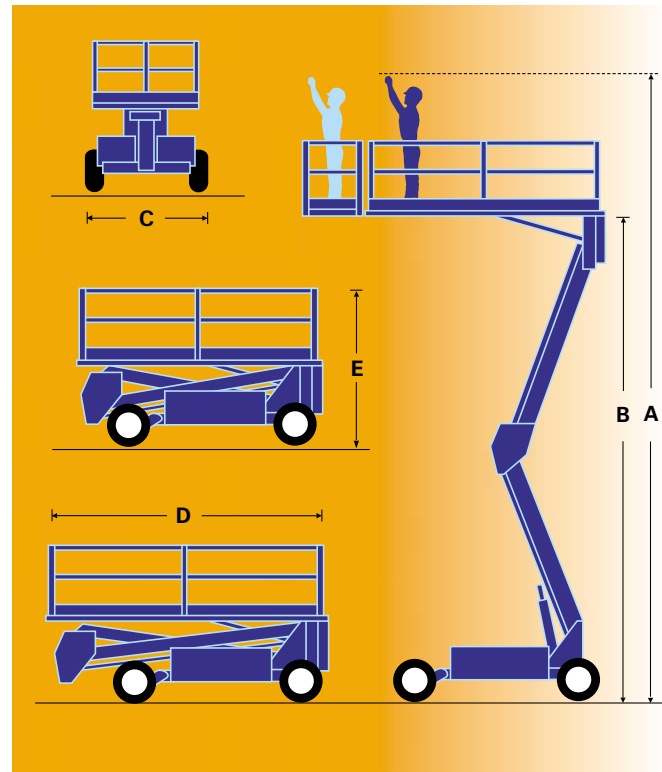

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight



The Speed Level allows fast platform levelling on slopes and uneven ground.



All models have oscillating axles to keep drive wheels in contact with uneven ground and have high levels of gradeability for tough sites and loading ramps.

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

