

UpRight SL26N/SL30N

Self-Propelled Lifts

- ◆ Working heights of 32 and 36 ft.
- ◆ Large, high capacity platform area
- ◆ Proportional drive/lift controls for smooth precise operation
- ◆ Electric and dual fuel power
- ◆ Ample work space for people and materials
- ◆ Driveable with platform fully elevated



UpRight

UpRight SL26N/SL30N

Key Standard Features

- ◆ Proportional joystick
- ◆ Interlocked controls
- ◆ Wiring for power at platform
- ◆ Fold down guardrails (except with roll-out deck)
- ◆ Dual multi-disc brakes
- ◆ Descent alarm
- ◆ Hour meter
- ◆ Fully automatic 40 amp battery charger with ammeter

Specifications	SL26N	SL30N
Platform capacity (max.)	1,300 lbs. (600 kg)	1,000 lbs. (454 kg)
Platform size (inside)	57.5 in. x 144 in. (1.46 m x 3.66 m)	57.5 in. x 166.25 in. (1.46 m x 4.23 m)
Weight - dual fuel electric	4,630 lbs. (2,100 kg) 4,960 lbs. (2,247 kg)	4,942 lbs. (2,242 kg) 5,272 lbs. (2,391 kg)
Working height	32 ft. (9.75 m)	36 ft. (10.97 m)
Platform height	25.5 ft. (7.93 m)	29.5 ft. (9.14 m)
Max. drive height	25.5 ft. (7.93 m)	29.5 ft. (9.14 m)
Stowed height	94.5 in. (2.40 m)	94.5 in. (2.40 m)
Length	149 in. (3.79 m)	173 in. (4.39 m)
Width	66 in. (1.67 m)	66 in. (1.67 m)
Wheelbase	100 in. (2.54 m)	100 in. (2.54 m)
Drive speed - maximum with platform raised	3.1 mph (5.0 km/h) 0.5 mph (0.8 km/h)	3.1 mph (5.0 km/h) 0.5 mph (0.8 km/h)
Gradeability - dual fuel electric	30% (16 degrees) 25% (14 degrees)	30% (16 degrees) 25% (14 degrees)
Axle ground clearance	7.75 in. (200 mm)	7.75 in. (200 mm)
Chassis ground clearance	12.5 in. (320 mm)	12.5 in. (320 mm)
Inside turning radius	9 ft. 9 in. (2.97 m)	9 ft. 9 in. (2.97 m)
Lift speed - raise/lower	20 sec./35 sec.	23 sec./35 sec.
Toeboards	6 in. (152 mm)	6 in. (152 mm)
Guardrails fold w/gate	43.5 in. (1.11 m)	43.5 in. (1.11 m)

Control system ..Proportional, single axis joystick with thumb rocker steering and interlocked controls


Power source20 HP Kohler Dual Fuel, 2 cyl., air cooled engine (gasoline/propane) or 2 24V DC electric motors, 8 6V 220 ampere hour batteries

TiresB78-13 ST slab

Parking brakeSpring-applied/hydraulic-released

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1990.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment. UpRight also manufactures a complete line of scaffolding and other aerial work platforms. Contact your UpRight distributor for information on other products.

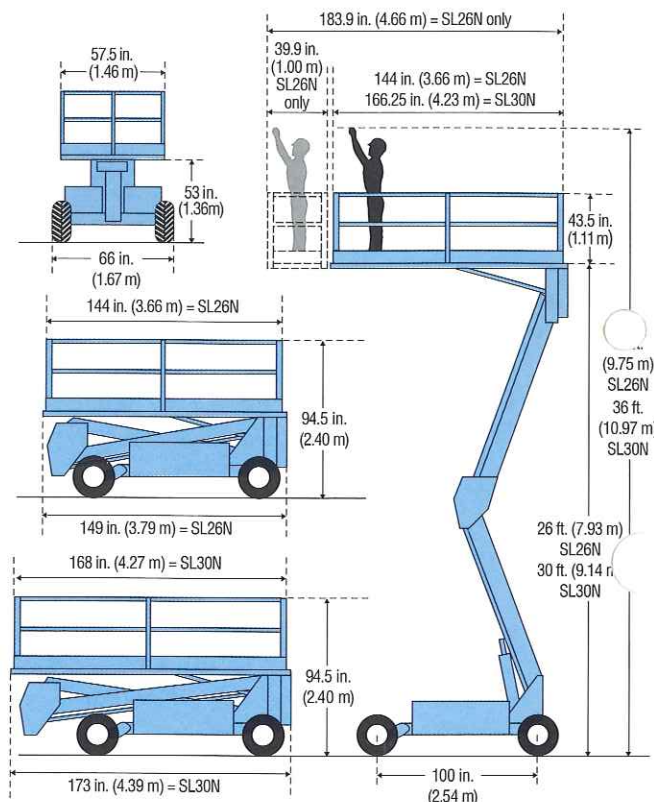

Options

- ◆ Kubota dual fuel engine, 3 cyl., water cooled, 23 HP
- ◆ 2000 watt/110V AC generator
- ◆ Flashing amber beacon/horn
- ◆ Poly filled slab or RT tires
- ◆ Roll out deck extension - for SL26N only
- ◆ Low voltage indicator for electric

UpRight

USA (800) 926-5438, (209) 896-5150, FAX: (209) 896-9012

1775 Park Street, Selma, CA 93662

Europe (353) 1-285-3333 FAX: (353) 1-284-0015

Pottery Road, Dun Laoire, Ireland

Printed in U.S.A. Copyright UpRight, Inc. 1994. Form No. 509-940810-A+