



**UpRight** 

## TI RANGE SPECIFICATION

	7100	TI 20	TL49
MODEL	TL33	TL38	11-1/40
MAX. WORKING HEIGHT	12,3m	13.5m	17.0m
MAX. PLATFORM FLOOR HEIGHT	10.3m	11.5m	15.0m
MAX, WORKING OUTREACH	5.0m	6.1m	8.3m
PLATFORM CAPACITY	215kg	215kg	215kg
PLATFORM DIMENSIONS (inside handrails)	0.6m x 1.2m	0.6m x 1.2m	0.6m x 1.2m
TRAVEL DIMENSIONS			
-width A	1.5m	1.5m	1.6m
-length B	5.5m	5.97m	5.98m
-height C	1.99m	1.99m	1.99m
STABILISER SPREAD	3.0m	3.3m	4.0m
GROSS WEIGHT	12 <mark>4</mark> 0kg	1470kg*	1900kg
ROTATION (non-continuous)	370°	370°	370°
POWER SOURCE	24V DC, 4x 6V 220 Ah Batteries		
OUTRIGGERS	Manual, Quickset™ With screw jack level adjusters. Electric interlocks prevent boom operation until all outriggers are taking load	Manual Quickset™ (see left) or Hydraulically operated (see right)	Hydraulically operated with overcentre lock valves and interlock system preventing operation until all outriggers are taking load
CONTROL SYSTEM	One-hand proportional joystick operating energy efficient motor control system complete with low voltage battery protection		
WHEELS	Plated steel disc road wheels 6.70 - 13c tyres 195R14 tyres		
BRAKING	Automatic reverse and overrun brakes plus handbrake		


## STANDARD FEATURES


Proportional one-hand joystick control
Large platform
Fully automatic on-board charger
24v DC motor and 220 Ah batteries
Hydraulic (TL38/TL49) or Quickset™
manual (TL33/TL38) outriggers
Outrigger interlocks and warning alarm
Energy-efficient motor control system
Tilt alarm (Hydraulic Outriggers)
Line contactor system for AC operation
Outrigger safety interlocks and warning lights
Cycle guards


## **OPTIONAL EXTRAS**

Power line to platform Hour meter Flashing beacon Fibreglass platform Spare tyre kit

\* Manual outrigger version - add 20kg for hydraulic outrigger version.

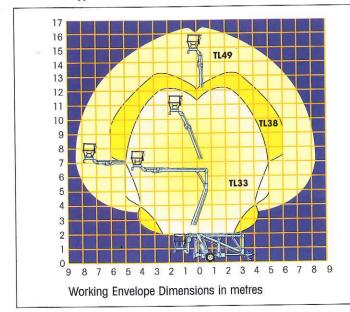

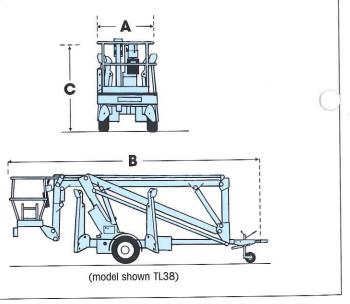



MANUFACTURED BY
Upright

## **UpRight**

Pottery Road, Dun Laoire, Ireland. Tel: +353 1 202 4100

Fax: +353 1 202 4101

Internet: http://www.uprighteuro.com

