

# Trailer Mount

**UpRight**  
POWERED ACCESS



- ☐ 12.2m working height
- ☐ 5m working outreach
- ☐ Proportional hydraulic controls
- ☐ Manual outriggers
- ☐ Small working footprint
- ☐ Automatic dual voltage battery charger

**TL34**

# TL34 trailer mount specifications

	TL34
max. working height	12.2m
max. platform height	10.2m
max. outreach	5.0m
platform capacity (SWL)	215kg
outrigger footprint (manual)	3.4m x 3.4m
outrigger footprint (hydraulic)	3.6m x 3.4m
turret rotation	360 degrees
platform depth	0.8m
platform width	1.2m
stowed height	2.2m
towing length	5.2m
towing width	1.5m
weight (manual)	1190kg
weight (hydraulic)	1290kg
control system	fully hydraulic proportional controls at platform and emergency controls at ground
power source	12v battery (2 x 6v 195Ah batteries)

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance.



BP2 - TL34 9/09

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


[www.upright.com](http://www.upright.com)

## standard features

- Load sensing outrigger interlocks with LED display
- Power Save descent feature
- Full proportional hydraulic controls at basket
- Emergency controls at ground
- Automatic reversing and overrun braking
- Automatic dual voltage battery charger
- Integral road lighting board
- 1 year parts and labour warranty
- 5 year structural warranty

## options

- Hydraulic outriggers
- Special paint colours

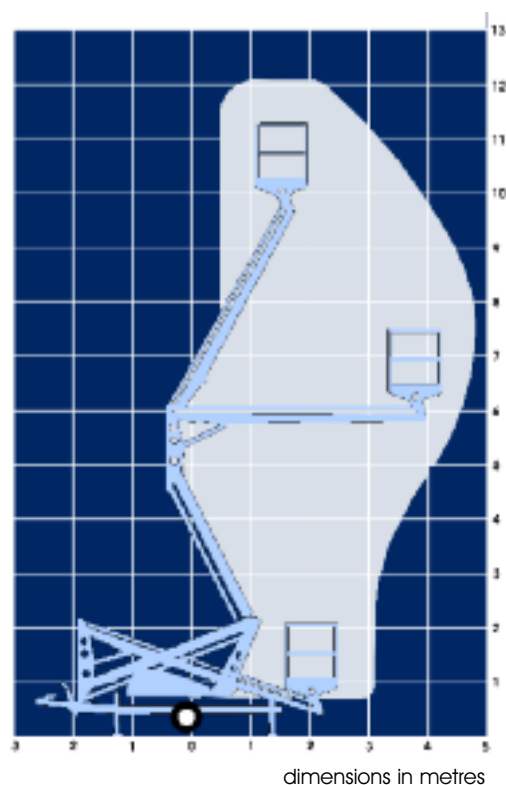

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**  
POWERED ACCESS