
UpRight

TL38

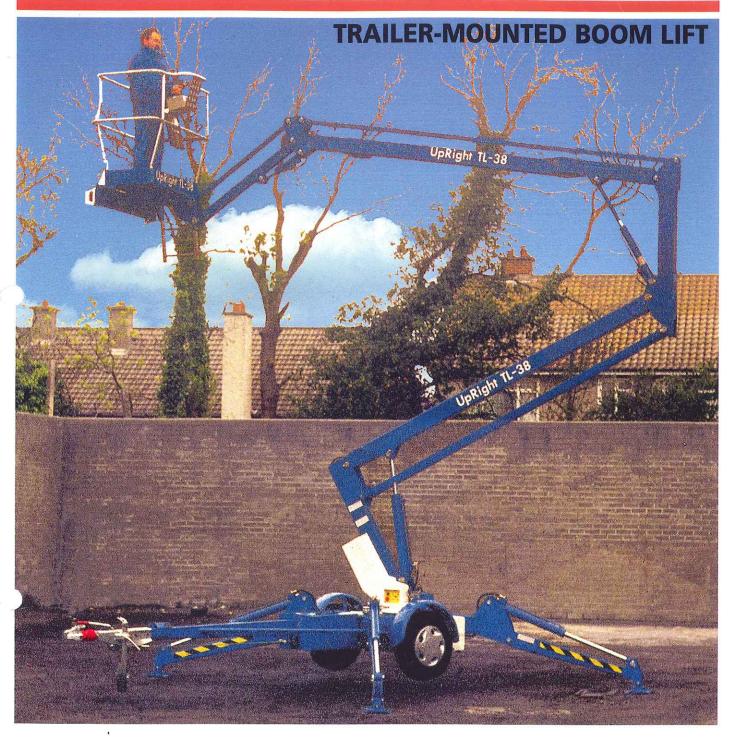

- 13.5m maximum working height
- 6.1m working outreach
- 1.5m travel width
- 215kg platform capacity
- Smooth proportional joystick controls


- Versatile 1.2m jib boom
- Manual 'Quickset' or Hydraulic outriggers
- 24VDC powered
- 5 year structural warranty


UpRight

STANDARD FEATURES

- ♦ Large platform ♦ Hydraulic or Quickset manual outriggers
- ♦ Outrigger interlocks and warning alarm ◆ Proportional joystick controls ◆ Energy-efficient motor control system giving precise control and long battery life ♦ Dual controls ◆ Fully automatic on-board charger ♦ 24V DC motor and 220 Ah batteries

SPECIFICATIONS	
Max. working height	13.5m
Max. platform height	11.5m
Max. working outreach	6.1m
Platform front outreach	5.6m
Jib length	1.2m
Platform capacity	215kg
Platform dimensions	0.6 x 1.2m
Rotation	
(non-continuous)	370°
Travel width	1.53m
Travel length	5.97m
Travel height	1.99m
Power source	4 x 6V 220 Ah batteries
System voltage	24VDC
Outriggers (Manual)	Quickset with screw jack level adjusters. Electric interlocks prevent boom operation until all outriggers are taking load
Outriggers (Hydraulic)	Hydraulically operated with P.O.check lockvalves and interlock system, preventing operation until all outriggers are taking load
Outrigger footprint	3.3 x 3.3m
Control system	One-hand proportional joystick operating energy-efficient motor control system
Wheels and tyres	Plated steel disc road wheels 185R13C 6 ply radial tyres
Braking	Automatic reverse and overrun brakes plus handbrake
Gross weight	1.7-21
(manual outriggers)	1,470kg
Gross weight (hydraulic outriggers)	1,490kg

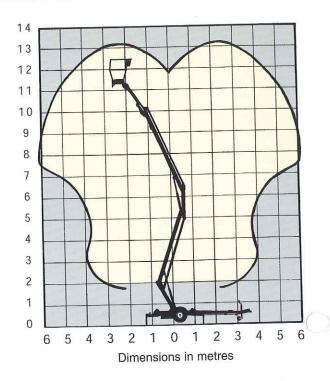







MANUFACTURED BY



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives.

Continuous A-weighted sound pressure level at workstation is 74.6 db(A)

UpRight

EUROPE

Pottery Road, Dun Laoire, Ireland.

Tel: +353 1 202 4100 Fax: +353 1 202 4102

Internet: http://www.uprighteuro.com