Trailer Mount






TL49K trailer mount specifications

	TL49K TRAILER MOUNT
max. working height	17.0m
max. platform height	15.0m
max. outreach	9.1m
platform capacity (SWL)	200kg
outrigger footprint	4.65m(A) x 4.65m(B)
turret rotation (non-continuous)	680°
platform rotation	90°
platform depth C	0.80m
platform width D	1.20m
stowed height E	2.10m
towing length F	7.10m
towing width G	1.75m
weight (battery model)	2250kg*
control system	fully proportional hydraulic controls
	at ground and basket
power source	24V battery (4 x 6V 195ah batteries) or 230V mains
power options	bi-energy (diesel and DC battery power)

* Machine towing weight depends on power configuration and supply of optional extras.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

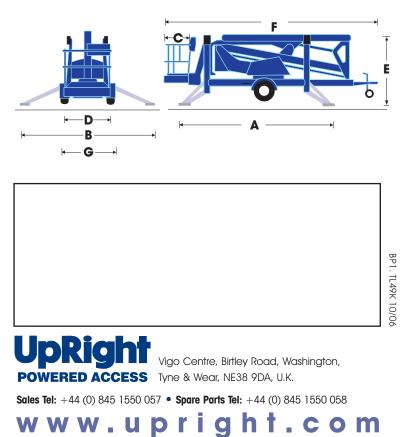



- Bi-Energy (diesel and DC battery) power
- GRP platform
- Special paint colours

Other options available on request

