
TL49

TRAILER MOUNTED LIFT

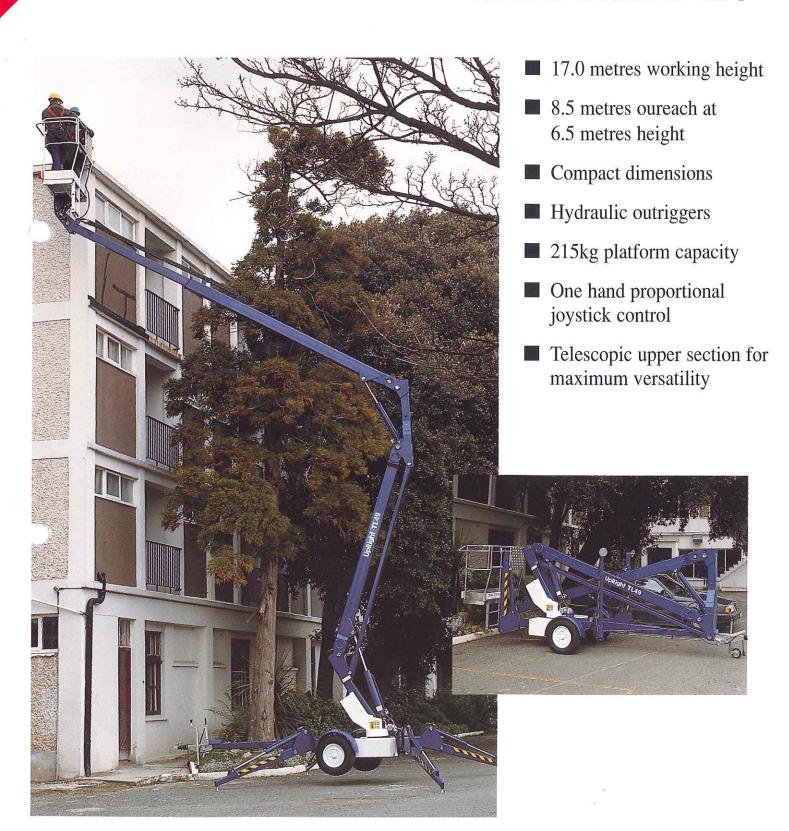

UpRight

TL49


TRAILER MOUNTED LIFT


STANDARD FEATURES

- Proportional one-hand joystick control
- Dual controls
- Large platform
- Powerful 24V DC motor and 220 Ah batteries

- Hydraulic outriggers
- Outrigger interlocks and warning alarm
- Energy-efficient motor control system for unrivalled battery life and smooth, precise controls
- Fully automatic on-board battery charger

SPECIFICATIONS	
Max. working height	17.0 m.
Max. platform floor height	15.0 m.
Max. working outreach	8.5 m.
Platform capacity	215 Kg.
Platform dimensions (inside guardrails)	0.7 m. x 1.3 m.
Travelling Dimensions: Length Width Height	5.9 m. 1.6 m. 1.99 m.
Stabiliser spread	3.7m
Gross weight	1900 Kg.
Rotation	360º non-continuous
Power source	24V DC 4HP, 4 x 6V 220 Ah batteries
Outrigger type	Hydraulically operated with individual controls lock valves and inter locks to prevent boom operation until all outriggers are taking load
Control system	One-hand proportional joystick operating energy-efficient motor control system.
Wheels	Plated steel disc road wheels fitted with 6.70- 13c tyres
Braking	Automatic reverse and overrun brakes plus handbrake

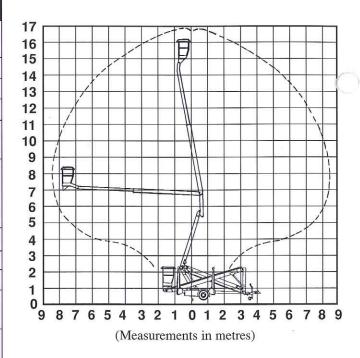

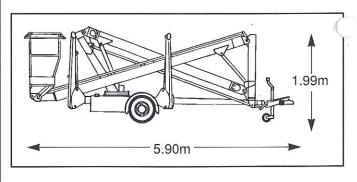

UpRid

Manufactured by

All specifications are provisional and subject to revision without prior notice

INSTANT

ZIP-UP

INSTANT ZIP-UP LTD AUDLEY AVENUE, NEWPORT, SHROPSHIRE TF10 7DP TEL: (01952) 825815 FAX: (01952) 825635