

UpRight

X20

SELF-PROPELLED LIFTS

- 8 metres working height
- Extremely tight turning radius
- Low stowed height and lifting rear guardrail for easy platform loading
- Swing out hydraulic/electric modules
- Automatic pothole protection system
- Very rigid scissor set for high platform stability
- Simple joystick control
- 5 year structural warranty



UpRight

STANDARD FEATURES


- Roll-out deck extension
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Hour meter/battery level indicator

- Pothole protection system
- Lift up rear handrail to ease loading
- Ground view grates in deck extension
- Crane and forklift points
- Emergency lowering at ground level.

Specifications

	X20N	X20W
Platform capacity (max.)	340 kg (750 lbs)	454kg (1,000 lbs.)
Platform size (inside)	0.71 m x 2.21 m (28 in. x 87 in.)	1.12 m x 2.21 m (44 in. x 87 in.)
Weight	1,656 kg (3,651 lbs)	1,737 kg (3,830 lbs.)
Working height	8.1m (26ft. 7in.)	8.1 m (26ft. 7 in.)
Platform height	6.1m (20 ft.)	6.1 m (20 ft.)
Max. drive height	6.1m (20 ft.)	6.1 m (20 ft.)
Stowed height	1.99 m (78.5 in.)	1.99 m (78.5 in.)
Length	2.34 m (92.5 in.)	2.34 m (92.5 in.)
Width	.82 m (32.5 in.)	1.21 m (48 in.)
Drive speed - maximum with platform raised	3.9km/h (2.4mph) 1.2km/h (0.7mph)	3.9km/h (2.4mph) 1.2km/h (0.7mph)
Gradeability	13 degrees (23%)	13 degrees (23%)
Inside turning radius	152 mm (6 in.)	152 mm (6 in.)
Ground clearance	114 mm (4.5 in.)	114 mm (4.5 in.)
Lift speed	28 sec.	28 sec.
Toeboards	152 mm (6 in.)	152 mm (6 in.)

Control system ...Smooth, one-hand joystick
 Drive systemDual front wheel hydraulic motors
 Tyres0.38 m (15") diameter solid rubber, non-marking
 Power source24V 4HP DC electric motor 4x 6V 220 AH batteries
 Battery charger ...25 amp automatic with ammeter
 Parking brake2 wheel, spring-applied hydraulic and manual release

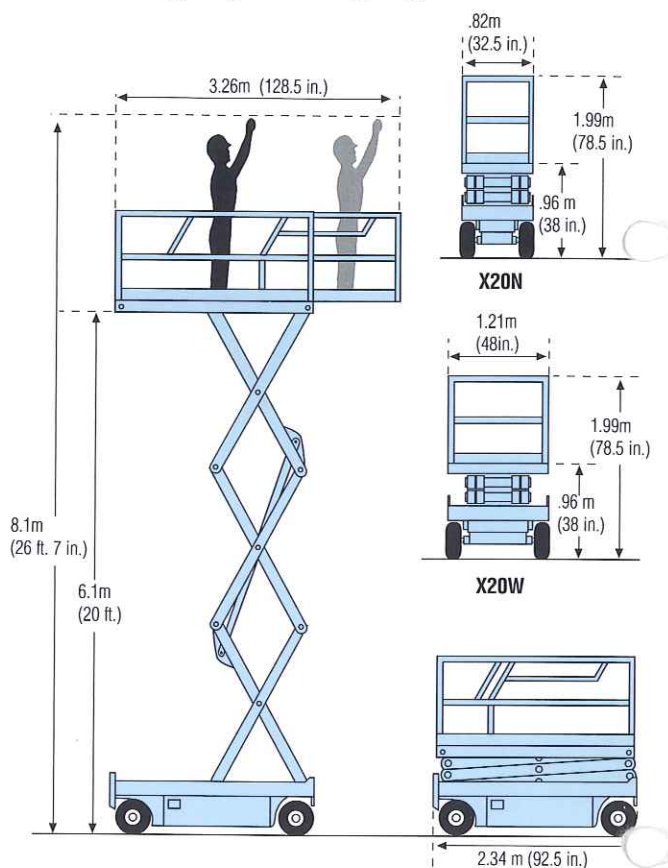

Options

- Emergency lowering from cage
- Horn
- Scissor Guard
- All motion alarm
- Flashing beacon
- Travel alarm
- Platform gate interlock
- Overload alarm

Meets or exceeds applicable requirements of OSHA and ANSI
A92.6 - 1990.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

Manufactured by

UpRight

EUROPE (353) 1 - 2853333

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.

CANADA (800) 461-4901

108 Industrial Dr., Whitby, Ontario, Can L1N5Z8.