

UpRight **X26 Ultra-N**

Scissor lift

ultra narrow electric

Working height to
10 m (32 ft.)

Only 825 mm (32.5 in.) wide
passes through standard
single doorway

Driveable at full height

Extra traction drive gives
14.5° (26%) gradeability

Extra rigid scissor
stack design

Five year
structural warranty



specifications	X26 Ultra-N
working height A	10m (32ft.)*
platform height B	7.93m (26ft.)
maximum drive height	7.93m (26ft.)
platform capacity	340kg (750lbs.) 3 persons
platform size (deck extended)	0.71m x 3.2m (28in. x 126in.)
weight	2,358kg (5200lbs.)
operational height	2.18m (86in.)
stowed height (guardrails retracted) E	1.99m (78.25in.)
length D	2.35m (92.5in.)
width C	825mm (32.5in.)
drive speed - max. with platform raised	3.2km/h (2.0mph.) 0.8km/h (0.5mph.)
gradeability	14.5° (26%)
inside turning radius	203mm (8in.)
lift speed - raise/lower	42 / 40 seconds
toeboards	152mm (6in.)
control system	smooth, one-hand proportional controller
drive system	dual front wheel hydraulic motors
tyres	380mm (15in.) diameter solid rubber, non-marking
power source	24V 4hp DC electric motor 4 x 6V 235 Ah batteries
battery charger	90V - 240V - 25 amp automatic
parking brake	2 wheel, spring-applied, hydraulically-released

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.
Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.
Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

914mm (3 ft.) roll-out deck
extension with foot pedal release

Quick retract guardrails

Lift-up rear handrail for
easy loading

Tilt alarm, descent alarm

Non-marking tyres

Selectable motion alarm

Chassis key switch

Swing-out service modules

Forktruck pockets

Wired for AC outlet on platform

Proportional controls

UpRight smart battery charger

Horn

Hour meter / low voltage indicator

1 year parts/service

5 year structural warranty

options

Removable controller


On-board generator

Flashing amber beacon

Air line to platform

Special paint colours

Environmental green oil

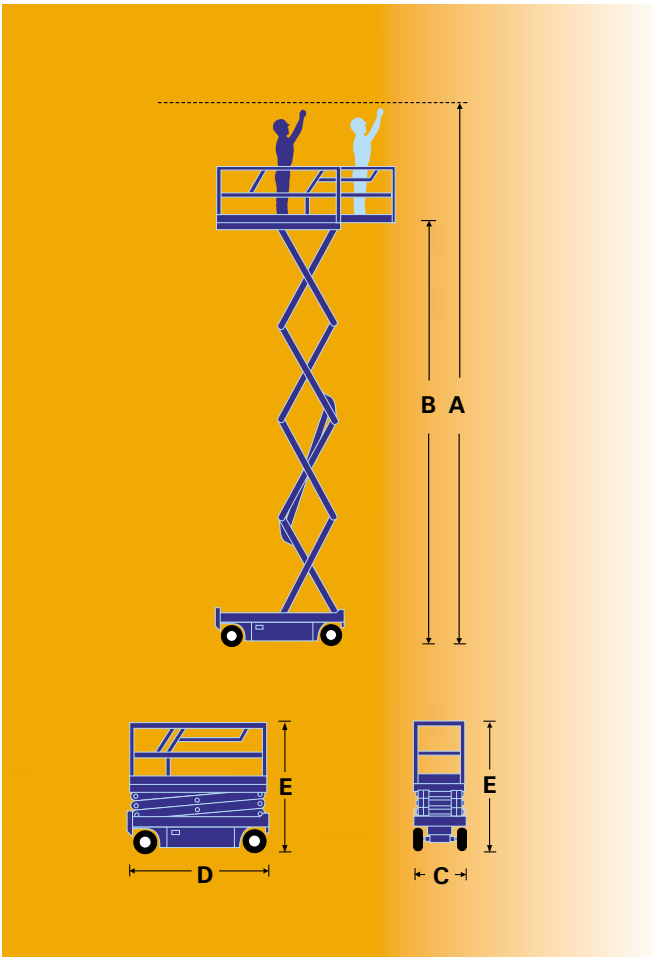

	Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.
	This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

UpRight



Quick retract guard rails and only 825mm (32.5in.) wide the X26 Ultra-N will pass through a single standard doorway.

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

