

**UpRight**  
**X26/32**

# Scissor lifts

standard electric

Working height up to:  
11.75m (36ft. 7in.)

Manoeuvres easily with  
tight inside turning radius

Electronic motor controller  
for smooth, quiet operation

Fully proportional  
one-hand controls

Steel deck with  
slip-resistant surface

Platform material  
loading system

Non-marking tyres  
protect floors


Five year  
structural warranty



specifications	X26	X32
working height (A)	9.93m (32ft.)*	11.75m (36ft. 7ins.)*
platform height (B)	7.93m (26ft.)	9.75m. (30ft. 7ins.)
drive height (max)	7.93m (26ft.)	9.75m. (30ft. 7ins.)
platform capacity (max)	454kg. (1000lbs.)	340kg. (700lbs.)
platform size - inside with deck extended	1.17m x 3.2m (46.25ins. x 126ins.)	1.17m x 3.2m (46.25ins. x 126ins.)
width (C)	1.22m.(48ins.)	1.22m.(48ins.)
stowed height (D)	2.12m.(83.5ins.)	2.25m.(88.5ins.)
- with guardrails lowered	1.99m (78ins.)	1.88m (74.25ins.)
length (E)	2.35m. (92.5ins.)	2.35m. (92.5ins.)
weight	2,153kg. (4,747lbs.)	2,486kg. (5,480lbs.)
drive speed (max)	3.2km/h. (2.0mph.)	3.2km/h. (2.0mph.)
-with platform raised	1.0km/h. (0.62mph.)	1.0km/h. (0.62mph.)
inside turning radius	203mm. (8ins.)	203mm. (8ins.)
control system	one-hand proportional control	
gradeability	12° (22%)	12° (22%)
lift speed - raised / lowered	45 secs./40 secs.	65 secs./40 secs.
drive system	dual front wheel hydraulic motors	
power source	4 x 6V 220 Ah batteries	
tyres	381mm (15ins.) dia. solid non-marking	
ground clearance	89mm. (3.5ins.)	89mm. (3.5ins.)
toeboards	152mm. (6ins.)	152mm. (6ins.)
battery charger	25 A, 110/220V AC	
parking brake	dual, spring-applied, hydraulic release	

\*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

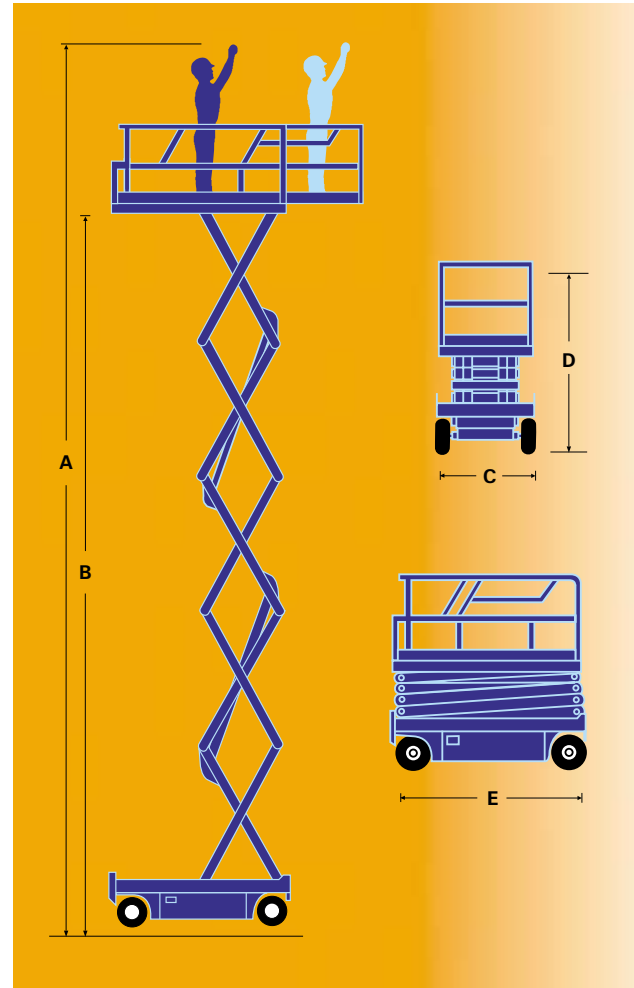

## standard features

- Roll-out deck extension
- One-hand proportional control
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Power to platform
- Selectable all motion alarm
- lift up rear guardrail to ease material loading
- Crane and forklift points
- Cushion down scissor descent

- Hour meter/low voltage indicator
- Dual front wheel drive
- 1 year parts/service
- 5 year structural warranty

## options

- Horn
- Removable controller
- Air line to platform
- Flashing beacon
- Special paint colours
- Environmental green oil



Non-marking tyres are fitted as standard to protect floor finishes.



Easily-accessible rear-mounted battery charger allows operation during charging. Swing out modules allow access to all service components in seconds, encouraging regular maintenance.

# UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**

