

# Tracked RT Scissor Lift

**UpRight**  
POWERED ACCESS



- ☐ 10.5m max. working height
- ☐ 500kg platform capacity
- ☐ Double deck extension
- ☐ 35% gradeability
- ☐ Bi-directional levelling
- ☐ Low ground bearing pressure

**X28T**


# X28T tracked scissor lift specifications

|  | X28T   |
|--|--|
| max. working height                              | 10.5m  |
| max. platform height <b>C</b>                    | 8.5m   |
| max. drive height                                | 8.5m   |
| platform capacity (SWL)                          | 500kg  |
| platform size                                    | 1.5m x 3.0m                                    |
| platform size with double deck extended <b>A</b> | 1.5m x 5.0m                                    |
| stowed height <b>F</b>                           | 2.9m   |
| overall length <b>B</b>                          | 3.0m   |
| overall width <b>E</b>                           | 1.6m   |
| gross weight                                     | 4400kg   |
| max. drive speed                                 | 2.2km/h  |
| gradeability                                     | 35%  |
| ground clearance <b>D</b>                        | 350mm  |
| levelling  | 5 degrees side-to-side, 3 degrees fore and aft |
| track width                                      | 300mm  |
| lifting controls                                 | single speed                                   |
| levelling controls                               | single speed                                   |
| drive control system                             | proportional joystick                          |
| power source                                     | Kubota 1505                                    |

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Upright Operators manual for detailed instructions on the proper use and maintenance.



300mm tracks - ideal for rough terrain applications and where low ground bearing pressure is required.



BP2, X28T 9/08

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


[www.upright.com](http://www.upright.com)

## standard features

- Heavy duty, 500kg lift capacity
- Twin 1m roll-out deck extensions
- Bi-directional levelling
- Low ground bearing pressure
- 1 year parts and labour warranty

## options

- 230V generator
- Special paint colours
- Environmental green oil

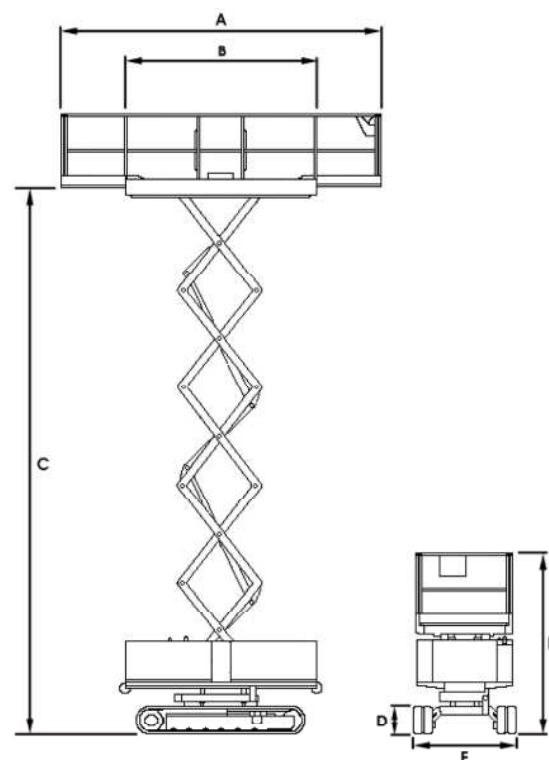

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**  
POWERED ACCESS