

Compact Scissor Lift

UpRight
POWERED ACCESS



- ☐ 12.1m working height
- ☐ Bi-energy power source
- ☐ Lightweight with excellent ground clearance
- ☐ 4 wheel drive
- ☐ Large platform area with 1.2m deck extension
- ☐ 4 hydraulic outriggers with auto-level
- ☐ Non-marking tyres

X33BE

X33BE bi-energy scissor lift specifications

	X33BE
max. working height	12.1m
max. platform height	10.1m
max. drive height	10.1m
platform capacity (SWL)	450kg
platform size (deck extended)	1.65m x 3.94m
deck extension	1.2m
overall width B	1.77m
overall length C	3.36m
lowered height A	2.7m
min height (guardrails folded)	2.0m
gross weight	3920kg
inside turning radius	2.83m
outside turning radius	4.60m
max. drive speed (lowered)	4.5km/h
ground clearance	350mm
gradeability	30%
tyres	non-marking 27-10.5-15 poly filled
drive system	4 wheel drive
power source	Kubota D-905 water cooled diesel 22.5hp and 4 x 6v 305Ah deep-cycle batteries



Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance.

standard features

- Bi-energy power source
- 1.2m roll-out deck extension
- 4 wheel drive
- 4 hydraulic outriggers with auto-level
- Proportional joystick control
- Non-marking tyres
- Articulating axle
- Driveable at full height
- Operator horn
- Drive motion alarm
- Lower warning alarm
- Fold-down guardrails
- 1 year parts and labour warranty
- 5 year structural warranty

options

- 110/240v power line to platform
- Special paint colours
- Environmental green oil

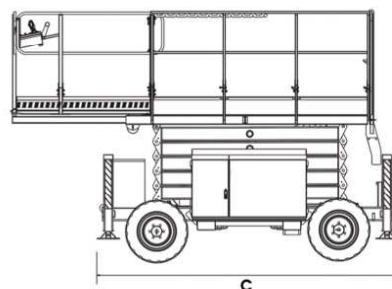

BP2: X33BE 9/08

UpRight
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058

www.upright.com



This product is available with the CE mark
confirming compliance with all relevant
European Machinery Directives

manufactured by

UpRight
POWERED ACCESS