

Rough Terrain Scissor Lift

UpRight
POWERED ACCESS



- ☐ 14.1m max. working height
- ☐ 4 wheel drive
- ☐ Large platform area with 1.2m deck extension
- ☐ 4 hydraulic outriggers with level sensor
- ☐ Foam filled, high grip tyres

X40RT

X40RT scissor lift specifications

	X40RT
max. working height	14.1m
max. platform height A	12.1m
max. drive height	9.75m
platform capacity (SWL)	340kg
platform size (deck extended)	4.27m x 1.80m
deck extension	1.2m
overall width	2.1m
overall length B	3.8m
lowered height C	2.70m
gross weight	4,681kg
inside turning radius	2.6m
outside turning radius	5.00m
max. drive speed (lowered)	3.5kmh
ground clearance	152mm
gradeability	30%
tyres	26x12 loader lug poly filled
drive system	4 wheel drive
controls	joystick proportional
power source	Kubota V-905 water cooled diesel 22.5hp

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.



BP1 - X40RT 8/07

UpRight
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


www.upright.com

standard features

- 1.2m roll-out deck extension
- 4 wheel drive
- 4 hydraulic outriggers with level sensor
- Proportional joystick control
- Articulating axle
- Foam filled lug tyres
- Operator horn
- Drive motion alarm
- Lower warning alarm
- 1 year parts and labour warranty
- 5 year structural warranty

options

- D-ring lanyard attachments
- Flashing amber beacon

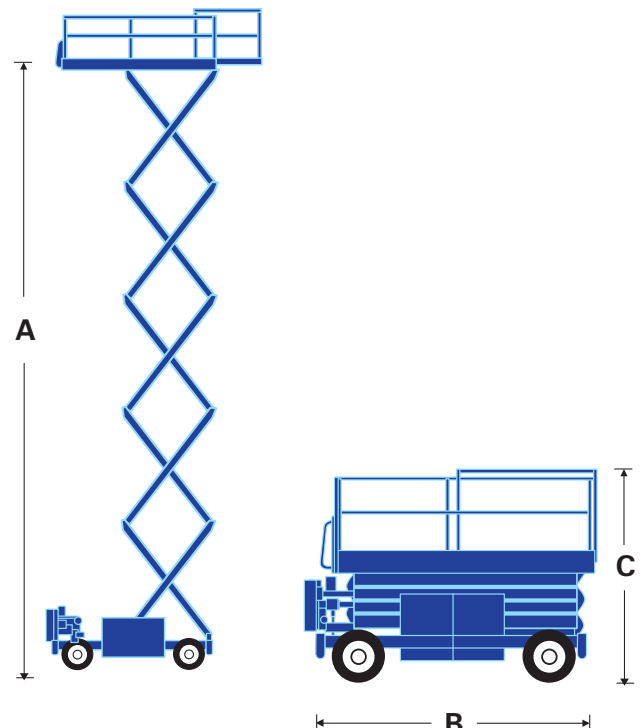

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS