

# Rough Terrain Scissor Lifts

**UpRight**  
POWERED ACCESS



- ☐ Working height up to 18m
- ☐ 4 wheel drive
- ☐ Twin 1.2m manually operated deck extensions
- ☐ 4 hydraulic outriggers with auto-level
- ☐ Proportional joystick controls with diagnostics

**X32RT**  
**X43RT**  
**X52RT**

# X32/43/52RT scissor lift specifications

	X32RT	X43RT	X52RT
max. working height	12.0m	15.0m	18.0m
max. platform height	10.0m	13.0m	16.0m
platform capacity (SWL)	1000kg	400kg	530kg
platform size (deck extended)	6.4m x 2.2m	6.4m x 2.2m	6.4m x 2.2m
deck extension (each of 2) <b>D</b>	1.2m	1.2m	1.2m
deck extension method	manual	manual	manual
overall width <b>A</b>	2.22m	2.22m	2.22m
overall transport length <b>C</b>	4.15m	4.15m	4.15m
lowered height <b>B</b>	2.75m	2.97m	3.17m
min height (guardrails folded)	1.76m	1.99m	2.20m
gross weight	6,200kg	6,700kg	7,500kg
outside turning radius	5.9m	5.9m	5.9m
max. drive speed stowed	8.0km/h	8.0km/h	8.0km/h
max. drive speed elevated	1.6km/h	1.6km/h	1.6km/h
gradeability	40%	40%	40%
ground clearance	400mm	400mm	400mm
elevation time to full height	37s	46s	55s
lowering time from full height	33s	41s	49s
tyres	10 x 6,5" foam filled all terrain		
control system	proportional joystick controls		
drive system	4 wheel drive		
power source	Kubota V-1505 water cooled diesel		

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance.





Hydraulic levelling outriggers with auto-level are provided as standard, making machine set up quick and easy.

## standard features

- 4 wheel drive
- 4 hydraulic levelling outriggers with auto-level
- Twin 1.2m manually operated deck extensions
- Powerful Kubota V-1505 water cooled diesel engine
- All steel module covers with swing-out engine tray
- Folding guardrails
- Proportional joystick controls with diagnostics
- Freewheel facility for towing
- Emergency manual outrigger retraction
- Audible descent alarm and slope sensor
- 1 year parts and labour warranty
- 5 year structural warranty

## options

- Powered deck extension
- Oscillating axle
- Exhaust scrubber
- Amber beacons
- Power to platform

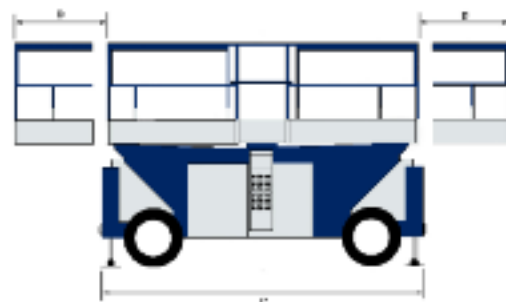

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058

[www.upright.com](http://www.upright.com)

BP2, X32/43/52RT 04/09



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**  
POWERED ACCESS