

UpRight MX15/MX19

SELF-PROPELLED LIFTS

- 6.6m or 7.8m working height
- Extremely tight turning radius
- Lightweight, compact and highly manoeuvrable
- Simple joystick control
- Drives through standard doorways
- Roll-out deck extension
- Non-marking tyres
- Pothole protection
- Five year structural warranty



UpRight

MX15/MX19

SELF-PROPELLED LIFTS

STANDARD FEATURES

- Roll-out deck extension
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Hour meter/battery level indicator

- Pothole protection
- Lift up rear handrail to ease loading
- Ground view gates in deck extension
- Crane and forklift points
- Emergency lowering at ground level.

Specifications



	MX15	MX19
Platform capacity (max.)	250 kg (550 lbs.)	227 kg (500 lbs.)
Platform size (inside) with deck extended	0.72 m x 2.46 m (28.5 in. x 97 in.)	0.72 m x 2.46 m (28.5 in. x 97 in.)
Weight	890 kg (1,962 lbs.)	980 kg (2,160 lbs.)
Working height	6.6 m (21 ft 6 in.)	7.8 m (25 ft 6 in.)
Platform height	4.6 m (15 ft.)	5.8 m (19 ft.)
Max. drive height	4.6 m (15 ft.)	5.8 m (19 ft.)
Stowed height	1.93 m (76 in.)	2.0 m (79 in.)
Length	1.59 m (62.75 in.)	1.59 m (62.75 in.)
Width	0.75 m (29.75 in.)	0.75 m (29.75 in.)
Drive speed - maximum with platform raised	4.4 km/h (2.7 mph) 1.2 km/h (0.7 mph)	4.4 km/h (2.7 mph) 1.2 km/h (0.7 mph)
Gradeability	14 degrees (25%)	14 degrees (25%)
Inside turning radius	25.4 mm (1 in.)	25.4 mm (1 in.)
Ground clearance	109 mm (4.3 in.)	109 mm (4.3 in.)
Lift speed	12 seconds	15 seconds
Toeboards	152 mm (6 in.)	152 mm (6 in.)

Control system ... Smooth, one-hand joystick
 Drive system Dual front wheel hydraulic motors
 Tyres 0.31 m (12") diameter solid rubber, non-marking
 Power source 24V 4HP DC electric motor 4x 6V 220 AH batteries
 Battery charger ... 25 amp automatic with ammeter
 Parking brake 2 wheel, spring-applied hydraulic and manual release

Options

- Horn
- All motion alarm
- Scissor guard
- Travel alarm
- Platform gate interlock
- Overload alarm (on loading)

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1990.
 Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

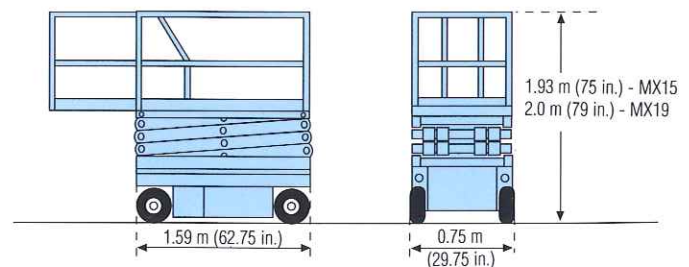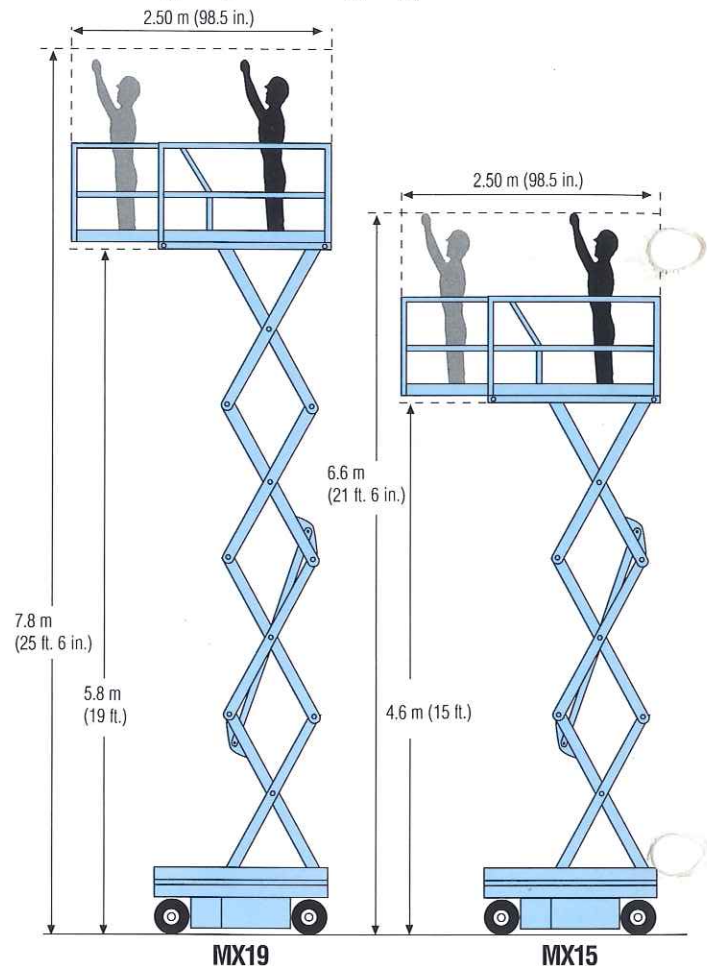

Manufactured by

UpRight

EUROPE (353) 1 - 2853333

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.

CANADA (800) 461-4901

108 Industrial Dr., Whitby, Ontario, Can L1N5Z8.