


XR40 RT scissor lift specifications

	XR40
max. working height A	14.1m
max. platform height B	12.1m
max drive height	9.8m
platform capacity (SWL)	340kg
- on rollout extension	158kg
platform size	4.3m x 1.8m
- with deck extended	3.93m x 1.65m
width C	2.1m
length D	3.8m
stowed height E	2.7m
gross weight	4,685kg
max drive speed - elevated	0.6km/h
max drive speed - stowed	3.5km/h
gradeability	30%
inside turning radius	5.1m
outside turning radius	2.7m
ground clearance	152mm
tyres	foam filled
power source	liquid cooled petrol/diesel

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

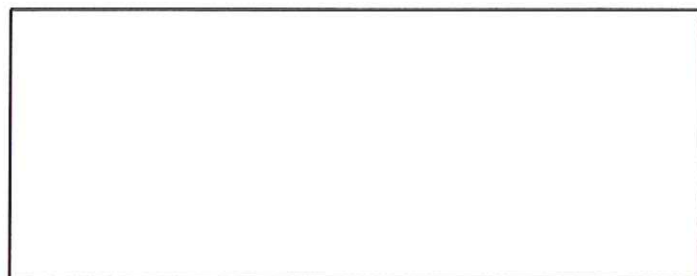

BP2 XR40 7/07

UpRight
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


www.upright.com

standard features

- Pothole protection system
- Level sensor
- Two wheel parking brake
- Fully proportional drive/lift
- 4 wheel drive system
- Drive motion alarm
- Hydraulic outriggers
- Hydraulic warm up kit
- High engine temp and low oil pressure shut down

options

- Non marking tyres
- Horn
- Key switch
- Flashing light
- AC generator
- Battery condition indicator

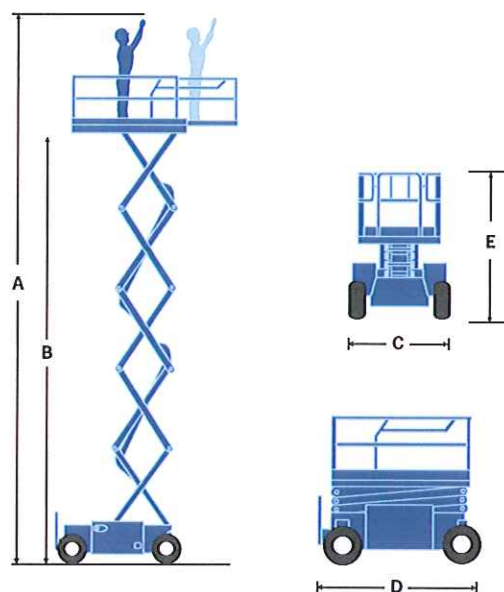

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS