

SERVICE BULLETIN

SB98.3

Serial Numbers: 6186-8817

Machines/Models: X31, X32 ONLY

THIS BULLETIN IS A SERVICE ADVISORY TO BE CARRIED OUT AT THE NEXT SERVICE INTERVAL.

DATE: April 27, 1998

PURPOSE: To reduce scissor brace end play.

OPERATION REQUIRED: Install Scissor Brace Bushing and Shims.

PARTS REQUIRED: Kit #030889-000

1 ea. Scissor Brace Bushing #030889-001

3 ea. Scissor Brace Shim #011786-017

REIMBURSEMENT: UpRight will reimburse the owner of record for 1/2 hour of labor at \$30.00 per hour. Reimbursement will be made upon receipt by UpRight of your completed warranty claim form. Please reference service bulletin SB98.3 on your warranty claim form.

PROCEDURE: Read all instructions thoroughly and refer to figure 1 before starting. Position machine on firm level surface.

1. Raise platform 7 feet/2.13m

NOTE: Support platform with suitable overhead device capable of supporting 2900 lbs./1315 Kg.

2. Remove roll pin using a hammer and roll pin punch. **NOTE: Always use proper eye protection when removing or installing roll pin.**
3. Remove scissor brace and existing shim.
3. Install Scissor Brace Bushing (#030889-001) with chamfered edge towards scissor arm.
4. Install scissor brace.
5. Install shims as needed to achieve minimum amount of end play.
6. Install roll pin and return scissor brace to its locked stowed position.
7. Remove overhead platform support and return platform to its stowed position.

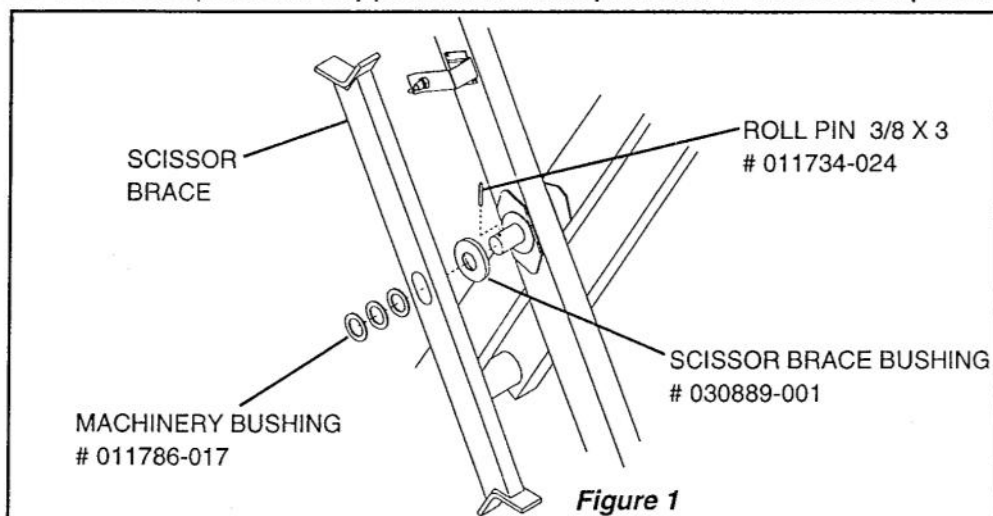


Figure 1

If you have any questions regarding this Service Bulletin, please contact the UpRight Product Support Department by telephone at (800) 926-5438 from within the USA or at (209) 891-5200 outside the USA or by FAX at (209) 896-9244.