
# UpRight

## **TL33**

### TRAILER MOUNTED BOOM LIFT

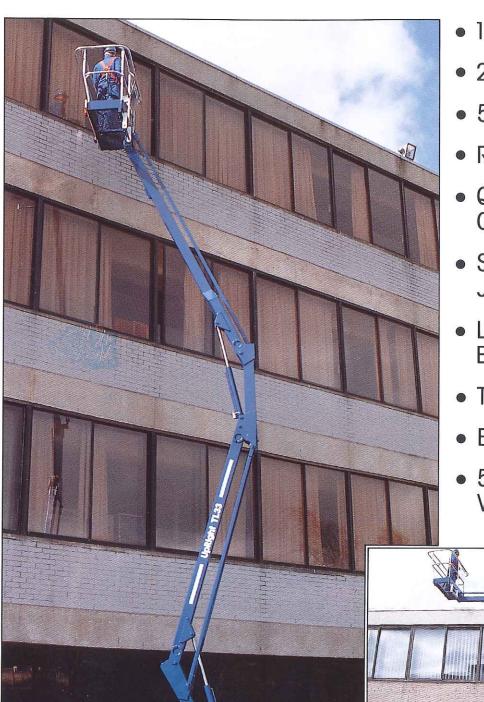

- 12.3m Working Height
- 215kg Lift Capacity
- 5m Working Outreach
- Rigid Stable Platform
- Quick and Easy Outrigger Operation
- Smooth Proportional Joystick Control
- Long Battery Life Between Recharges
- Travel Width only 1.5m
- Easy to Tow
- 5 Year Structural Warranty

## **TL33**


### TRAILER MOUNTED BOOM LIFT


#### STANDARD FEATURES

- Proportional one-hand joystick control
- Dual controls
- Quick-set outriggers
- Large platform

- Outrigger interlocks and warning alarm
- Powerful 24V DC motor and 220 Ah batteries
- Energy-efficient motor control system for unrivalled battery life and precise controls
- Fully automatic on-board battery charger

#### TL33 WORKING ENVELOPE

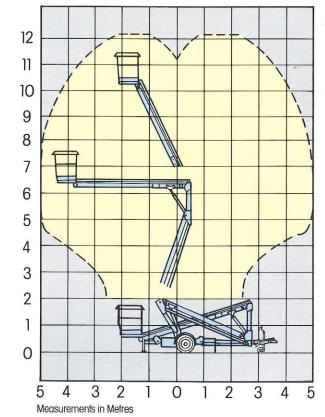



MANUFACTURED BY



#### SPECIFICATIONS

Max. Working Height	12.3m
Max. Platform Floor Height	10.3m
Max. Working Outreach	5.0m
Platform Capacity	215kg
Platform Dimensions	0.7m x 1.3m (inside handrails)
Travelling Dimensions	Width 1.50m Length 5.50m Height 1.99m
Stabiliser Spread	3.0m ·
Gross Weight	1160kg
Rotation	360° non-continuous
Power Source	24v DC 4HP, 4 x 6V 22O Ah batteries.
Outrigger Type	Manual quick-set with screw jack level adjusters. Electric interlocks prevent boom operation until all stabilisers are taking load.
Control System	One-hand proportional joystick operating energy-efficient motor control system.
Wheels	Plated steel disc road wheels fitted with 6.70 — 13c tyres.
Braking	Automatic reverse and overrun brakes plus handbrake.

#### **OPTIONS**

- Hydraulic Outriggers
- AC Power Source
- Pedestrian Guards
- Flashing Amber Beacon
- Fibreglass Cage
- Power Cable to platform
- Tilt Alarm

### **UpRight**

EUROPE (353) 1 - 2853333

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.