## **SELF-PROPELLED LIFT**

- 10.0 m working height
- Extremely tight turning radius
- Lifting rear guardrail for easy platform loading
- Swing out hydraulic/electric modules
- Automatic pothole protection system
- **■** Non marking tyres
- **■** Simple joystick control
- **■** Five year structural warranty



UpRight

**X26** 

## **SELF-PROPELLED LIFT**

## STANDARD FEATURES

- Roll-out deck extension
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Hour meter/battery level indicator

■ Pothole protection system

- Lift up rear handrail to ease loading
- Ground view grates in deck extension
- Crane and forklift points
- Emergency lowering at ground level.

**Specifications** 

Platform capacity (max.)	454 kg	1,000 lbs.
Platform size (inside)	1.17m x 2.21m	46.25in. x 87in.
Weight	1,957 kg	4,315 lbs.
Working height	10.0 m	32 ft. 7in.
Platform height	8.0 m	26ft.
Max. drive height	8.0 m	26ft.
Operational height	2.11 m	83in.
Stowed height	1.98 m	78 in.
Length	2.35 m	92.5 in.
Width	1.22 m	48 in.
Drive speed - maximum	3.9 km/h	2.4 mph
with platform raised	1.2 km/h	0.7 mph
Gradeability	12 degrees	22%
Inside turning radius	152 mm	6 in.
Ground clearance	114 mm	4.5 in.
Lift speed	40 sec.	40 sec.
Toeboards	152 mm	6 in.

Control system ... Smooth, one-hand joystick

Drive system ......Dual front wheel hydraulic motors

Tyres ......0.38 m (15") diameter solid rubber, non-marking


Power source ......24V 4HP DC electric motor 4x 6V 220 AH batteries

Battery charger ...25 amp automatic with ammeter

Parking brake .....2 wheel, spring-applied hydraulic and manual release

## **Options**

- · Emergency lowering from cage
- Horn
- · Scissor Guard
- · All motion alarm
- · Flashing beacon
- Travel alarm
- · Platform gate interlock
- Overload alarm

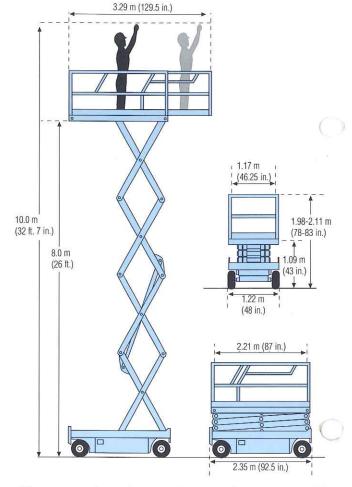

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1990.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

Manufactured by



**EUROPE (353) 1 - 2853333** 

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.

CANADA (800) 461-4901

108 Industrial Dr., Whitby, Ontario, Can L1N5Z8.