


UpRight

TL Range

TRAILER MOUNTED BOOM LIFTS



- 12.3 or 17 metre working heights
- 215kg Lift capacity
- Up to 8.3 metres outreach
- Quick, easy outrigger operation
- Smooth proportional joystick controls
- Compact dimensions for easy towing
- 5 year structural warranty

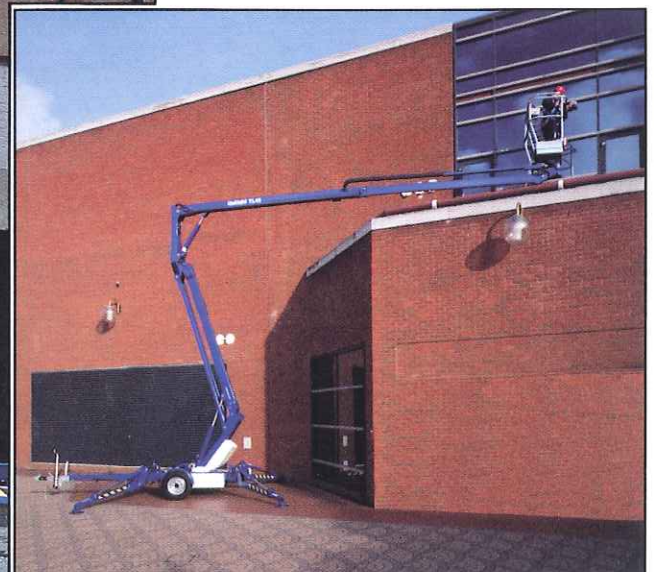

TL Range



TRAILER MOUNTED BOOM LIFTS

STANDARD FEATURES

- Proportional one-hand joystick control
- Dual controls
- Large platform
- Fully automatic on-board charger
- 24V DC motor and 220 Ah batteries
- Hydraulic (TL49) or Quickset manual outriggers
- Outrigger interlocks and warning alarm
- Energy-efficient motor control system giving precise control and long battery life

SPECIFICATIONS

	TL33	TL49
Max. working height	12.3m	17.0m
Max. platform floor height	10.3m	15.0m
Max. working outreach	5.0m	8.3m
Platform capacity	215kg	215kg
Platform dimensions (inside handrails)	0.6 x 1.3m	0.6 x 1.2m
Travel dimensions		
- width	1.50m	1.60m
- length	5.50m	5.98m
- height	1.99m	1.99m
Stabiliser spread	3.0m	4.0m
Gross weight	1240kg	1900kg
Rotation (non-continuous)	370°	370°
Power source	24V DC, 4 x 6V 220 Ah Batteries	
Outriggers	Manual, Quickset with screw jack level adjusters. Electric interlocks prevent boom operation until all outriggers are taking load	Hydraulically operated with overcentre lock valves and interlock system preventing operation until all outriggers are taking load
Control system	One-hand proportional joystick operating energy efficient motor control system	
Wheels	Plated steel disc road wheels 6.70 - 13c tyres 195R14 tyres	
Braking	Automatic reverse and overrun brakes plus handbrake	

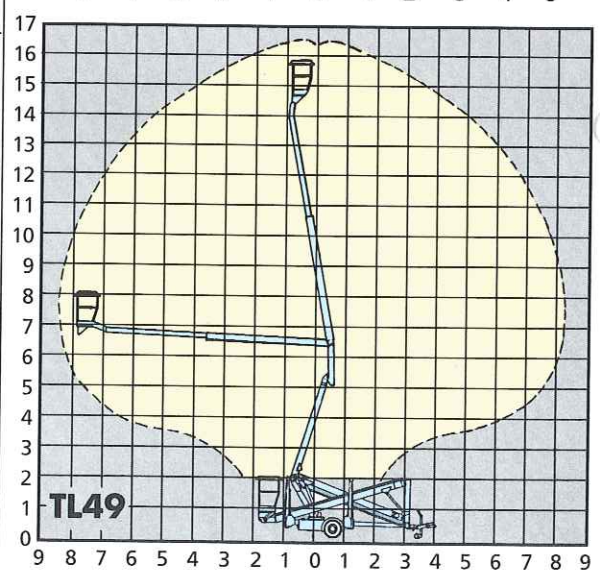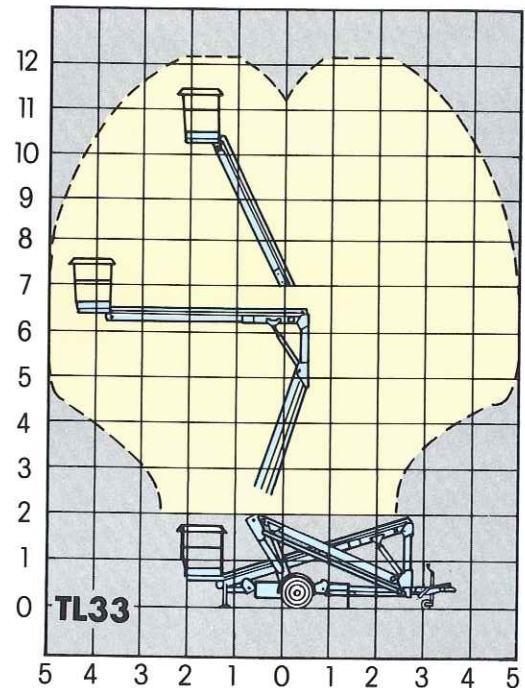

Dimensions in metres

UpRight

EUROPE (353) 1 - 2853333

Pottery Road, Dun Laoire, Ireland.

USA (800) 926-5438

1775 Park St., Selma, CA 93662.